


Floor Profiles for floors with PVC or linoleum

FLK 21



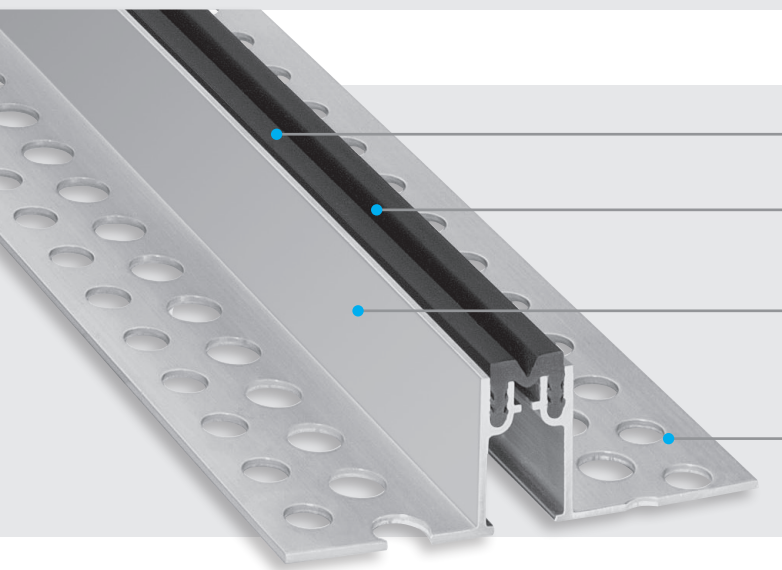

Flexible high quality elastomeric insert upstand 3 mm
Hard wearing, temperature resistant (-30°C to +120°C), replaceable

Multi directional movement

Quick and easy installation
Solid, but light aluminium brackets for quick installation in floorings with PVC or linoleum coverings (insert with 3 mm upstand, weldable)

MultiHole mounting bracket
for secure fixing

Profile	Joint width max. b_f max [mm]	Total Movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Installation height h [mm]	Load capacity*  [kN]	Load capacity  [kN]
FLK 21/20	20	5 (+3/-2)	21	80	20	30	-
FLK 21/35	20	5 (+3/-2)	21	107	35	30	-
FLK 21/50	20	5 (+3/-2)	21	107	50	30	-

*not designed for permanent use.
For installation in asphalt, please ask for our technical advice.

Profiles of series FLK 21 are supplied with flush mounted distance insert of FL 21. The top edge of the aluminium profile can be used as a screeding guide. The distance insert protects the profile until covering is laid. This method avoids damage of profile caused by site traffic.

Standard colours: grey
Production length: 4 m

