


Floor Profiles for floors with carpets

FLT 21



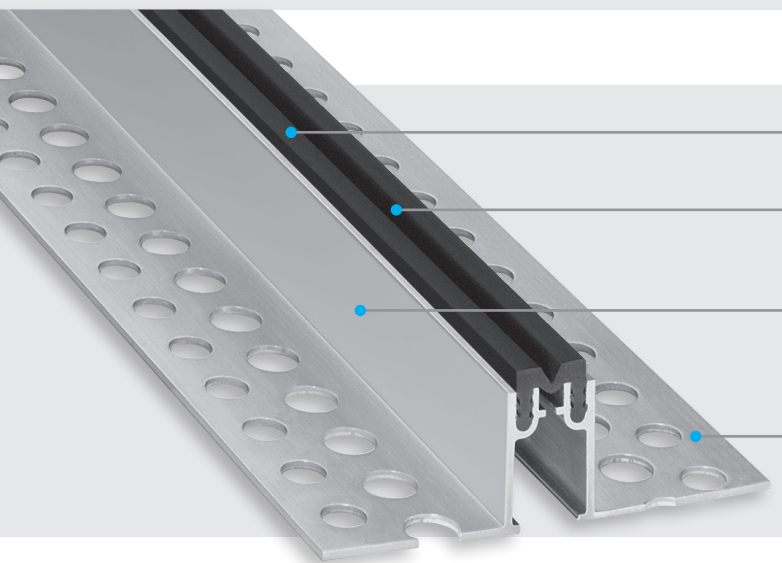

Flexible high quality elastomeric insert upstand 5 mm
Hard wearing, temperature resistant (-30°C to +120°C), replaceable

Multi directional movement

Quick and easy installation
Solid, but light aluminium brackets for quick installation in floors with carpet or rubber coverings (insert with 5 mm upstand)

MultiHole mounting bracket
for secure fixing

| Profile | Joint width max. $b_f \text{ max}$ [mm] | Total Movement Δb_f [mm] | Visible width of profile b_s [mm] | Total width of profile b_t [mm] | Installation height h [mm] | Load capacity*  [kN] | Load capacity  [kN] |
|-----------|---|--|---|---|------------------------------------|--|---|
| FLT 21/20 | 20 | 5 (+3/-2) | 21 | 80 | 20 | 30 | - |
| FLT 21/35 | 20 | 5 (+3/-2) | 21 | 107 | 35 | 30 | - |
| FLT 21/50 | 20 | 5 (+3/-2) | 21 | 107 | 50 | 30 | - |

*not designed for permanent use
For installation in asphalt, please ask for our technical advice.

Profiles of series FLT 21 are supplied with flush mounted distance insert of FL 21. The top edge of the aluminium profile can be used as a screeding guide. The distance insert protects the profile until covering is laid. This method avoids damage of profile caused by site traffic.

Standard colours: black, grey

Production length: 4 m

