


## Profiles with hygienic requirements

### FLG 21

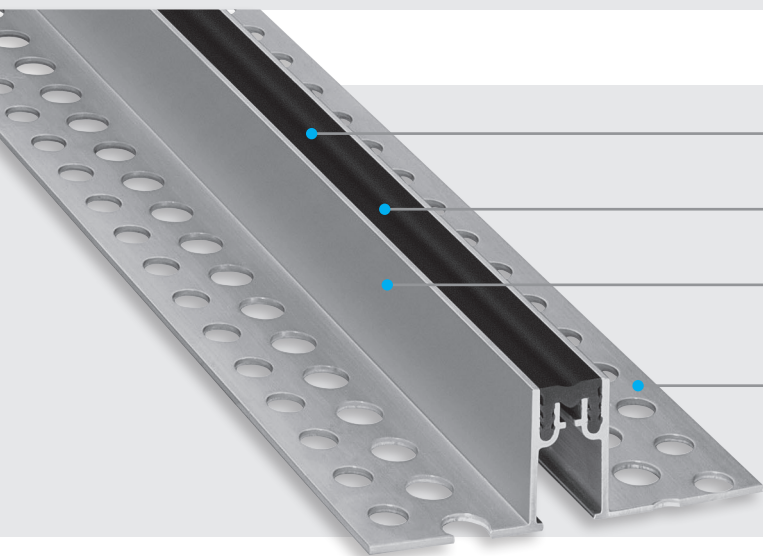

**Flexible high quality elastomeric insert**

Hard wearing, temperature resistant (-30°C to +120°C), replaceable

**Smooth visible surface for easy cleaning**




Antibacterial and physiologically safe

**Quick and easy installation**

Solid, but light aluminium brackets for quick installation in screed or tiled floorings

**MultiHole mounting bracket**

for secure fixing

Profile	Joint width max. <b>b<sub>f</sub> max</b> [mm]	Total Movement <b>Δb<sub>f</sub></b> [mm]	Visible width of profile <b>b<sub>s</sub></b> [mm]	Total width of profile <b>b<sub>t</sub></b> [mm]	Installation height <b>h</b> [mm]	Load capacity*  /  [kN]	Load capacity  [kN]
FLG 21/20	20	2 (± 1)	21	107	20	30	-
FLG 21/35	20	2 (± 1)	21	111	35	30	-
FLG 21/50	20	2 (± 1)	21	111	50	30	-

\*not designed for permanent use  
For installation in asphalt, please ask for our technical advice.

Standard colours: black, grey  
Production length: 4m

