


## Profiles with hygienic requirements

### FPG 26 NI

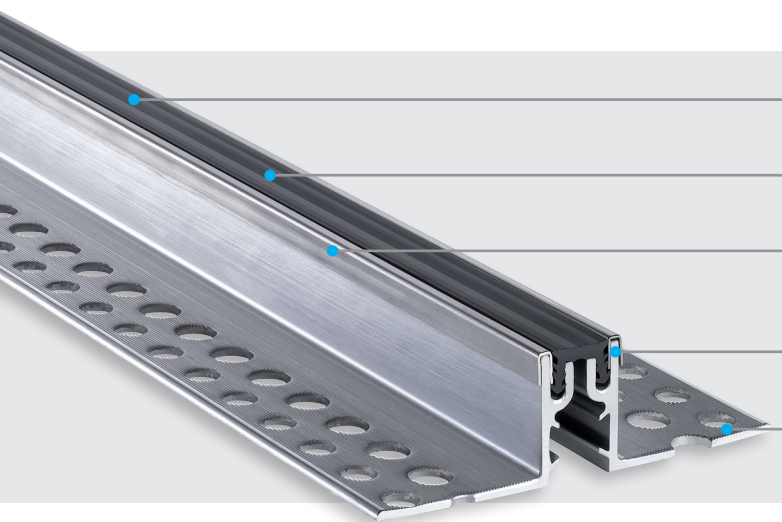

**Flexible high quality elastomeric insert**

Hard wearing, temperature resistant (-30°C to +120°C), replaceable

**Smooth visible surface for easy cleaning**

Antibacterial and physiologically safe

**Visible surface stainless steel**

**High load capacity due to sturdy construction**

Solid aluminium brackets

**MultiHole mounting bracket**

for secure fixing

Profile max.	Joint width Movement $b_f \text{ max}$ [mm]	Total of profile $\Delta b_f$ [mm]	Visible width of profile $b_s$ [mm]	Total width height $b_t$ [mm]	Installation $h$ [mm]	Load capacity  [kN]	Load capacity  [kN]	Load capacity  [kg/mm wheel width]
FPG 26 NI	20	2 ( $\pm 1$ )	27	128	35	300	70	5

For installation in asphalt, please ask for our technical advice.

Standard colours: black, grey

Production length: 4 m

