


## Profiles with hygienic requirements

### FPG 55

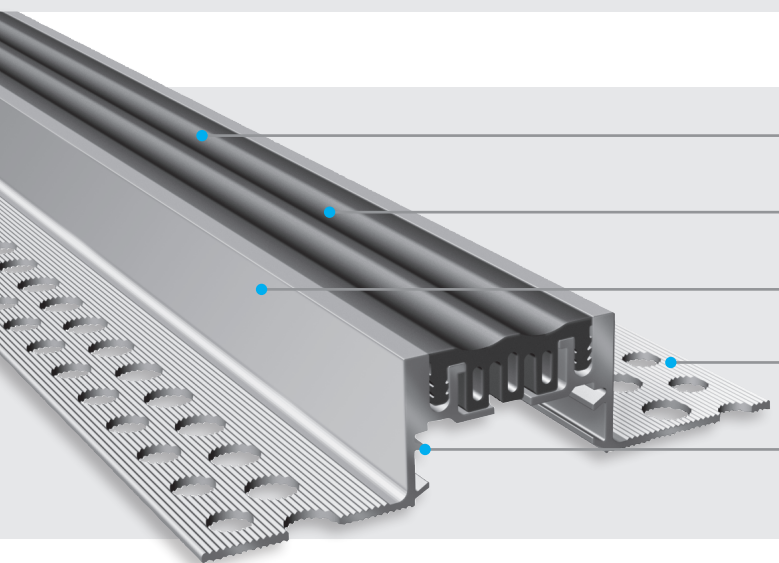

**Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable

**Smooth visible surface for easy cleaning**  
Antibacterial and physiologically safe

**High load capacity due to sturdy construction**  
Solid aluminium brackets

**MultiHole mounting bracket**  
for secure fixing

**Quick and easy installation**  
Positive connection of production lengths by means of connection pieces

Profile	Joint width max. <b>b<sub>f</sub> max</b> [mm]	Total Movement <b>Δb<sub>f</sub></b> [mm]	Visible width of profile <b>b<sub>s</sub></b> [mm]	Total width of profile <b>b<sub>t</sub></b> [mm]	Installation height <b>h</b> [mm]	Load capacity [kN]	Load capacity* [kN]	Load capacity [kN]
FPG 55/20	50	8 (± 4)	55	150	20	30	300	-
FPG 55/25	50	8 (± 4)	55	150	25	30	300	-
FPG 55/35	50	8 (± 4)	55	150	35	30	300	-
FPG 55/50	50	8 (± 4)	55	150	50	30	300	-
FPG 55/75	50	8 (± 4)	55	150	75	30	300	-

\*not designed for permanent use.  
Larger heights on request. For installation in asphalt, please ask for our technical advice.

Standard colours: black, grey, beige  
Production length: 4 m

