


## Profiles with hygienic requirements

### ESG 20 Solid Stainless Steel

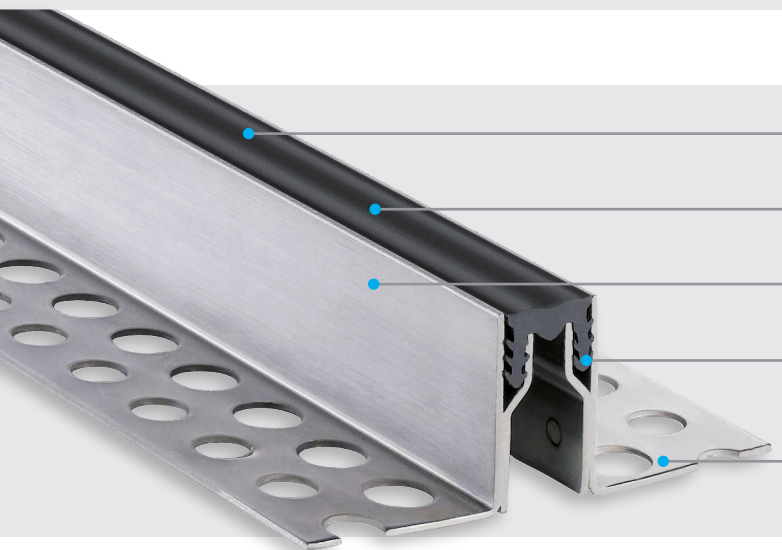

**Flexible high quality elastomeric insert**

Hard wearing, temperature resistant (-30°C to +120°C), replaceable

**Smooth visible surface for easy cleaning**

Antibacterial and physiologically safe




**Solid stainless steel brackets**

Resistant to aggressive media (e.g. sea water)

**Multi directional movement**

**MultiHole mounting bracket**

for secure fixing

Profile	Joint width max. <b>b<sub>f</sub> max</b> [mm]	Total Movement <b>Δb<sub>f</sub></b> [mm]	Visible width of profile <b>b<sub>s</sub></b> [mm]	Total width of profile <b>b<sub>t</sub></b> [mm]	Installation height <b>h</b> [mm]	Load capacity*  /  [kN]	Load capacity  [kN]
ESG 20/20	20	2 (± 1)	20	126	20	30	-
ESG 20/35	20	2 (± 1)	20	95	35	30	-
ESG 20/40	20	2 (± 1)	20	95	40	30	-
ESG 20/50	20	2 (± 1)	20	95	50	30	-

\*not designed for permanent use  
Larger heights on request.

**Material:** 1.4301 (alloy 304) Stainless steel: mill finish

**Standard colours:** black, grey

**Production length:** 3 m, ES 20/20: 2 m

