


Profiles with hygienic requirements

FNG 20

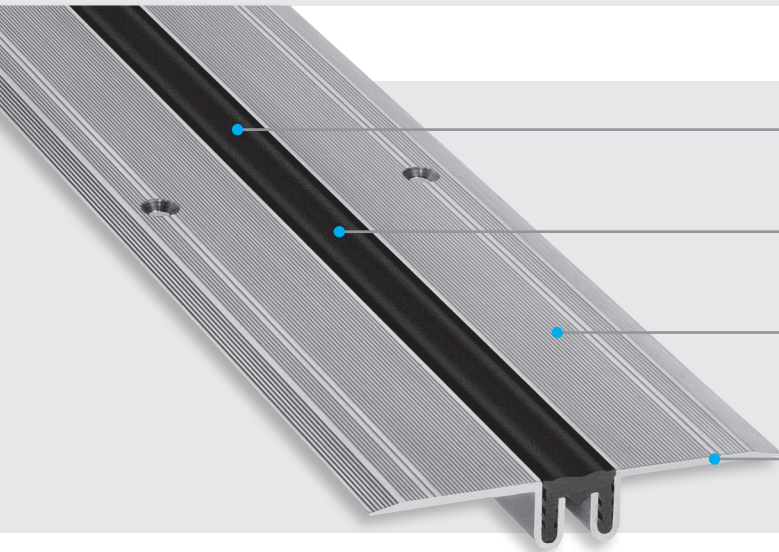


Flexible high quality elastomeric insert
Hard wearing, temperature resistant (-30°C to +120°C)

Economical
Insert replaceable at any time

Anti-slip-surface ensures good skid resistance
Special Striated surface, also suitable for sports areas

Very flat design
Perfect for surface fixing

Profile	Joint width min. b_f min [mm]	Total Movement Δb_f [mm]	Total width of profile b_t [mm]	Installation height min. h [mm]	Thickness of visible alu side plates [mm]	Load capacity* 
FNG 20	20	2 (± 1)	97	12	2	Pedestrians

*Light vehicles on request.

Standard colours: black, grey
Production length: 4 m

