


## Profiles for refurbishment, renovation and modernization

### FKN 20 / FTN 20

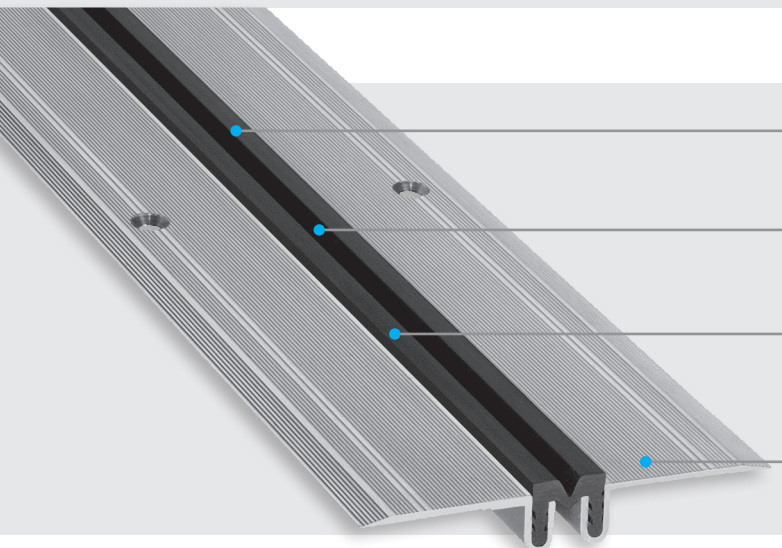

#### Perfectly designed insert

FKN 20: 3 mm high upstand can be welded with PVC floorings  
FTN 20: 5 mm high upstand in conjunction with carpets

#### Flexible high quality elastomeric insert

Hard wearing, temperature resistant (-30°C to +120°C)

#### Economical

Insert replaceable at any time

#### Very flat design

Perfect for surface fixing

Profile	For PVC floorings [mm]	For carpet floorings [mm]	Joint width min. <b>b<sub>f</sub> min</b> [mm]	Total Movement <b>Δb<sub>f</sub></b> [mm]	Total width of profile <b>b<sub>t</sub></b> [mm]	Installation height min. <b>h</b> [mm]	Thickness of visible alu side plates [mm]	Load capacity* 
FKN 20	3	–	20	5 (+3/-2)	17	12	2	Pedestrians
FTN 20	–	5	20	5 (+3/-2)	17	12	2	Pedestrians

\*Light vehicles on request.

Standard colours: FKN: grey, FTN 20: grey, black

Production length: 4 m

