


Profiles for refurbishment,
renovation and modernization

FN 50 / FN 58 / FN 65 / FN 85

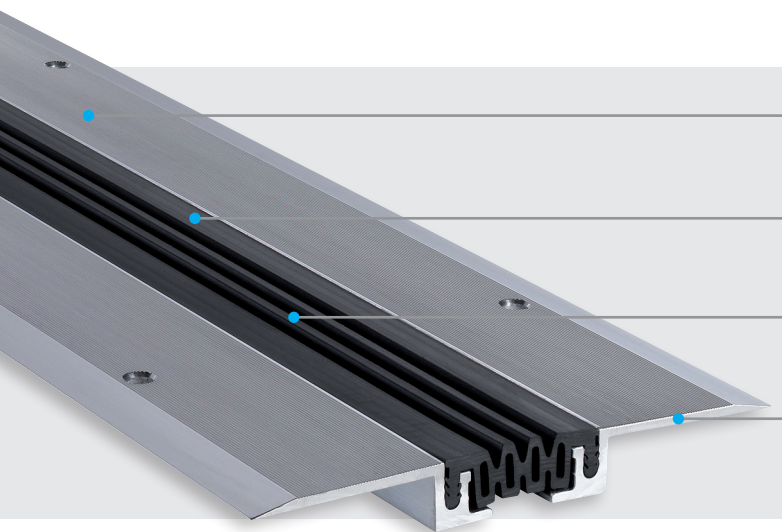


Anti-slip-surface ensures good skid resistance
Special Striated surface, also suitable for sports areas

Flexible high quality elastomeric insert
Hard wearing, temperature resistant (-30°C to +120°C)

Economical
Insert replaceable at any time

Very flat design
Perfect for surface fixing

Profile	Joint width min. b_f min [mm]	Total Movement Δb_f [mm]	Width of Synca insert [mm]	Total width of profile b_t [mm]	Installation height min. h [mm]	Thickness of visible alu side plates [mm]	Load capacity* 
FN 50	50	16 (± 8)	43	170	16	3	Pedestrians
FN 58	60	22 (± 11)	52	178	16	3	Pedestrians
FN 65	80	22 (± 11)	52	224	18	4	Pedestrians
FN 85	100	30 (± 15)	70	242	18	4	Pedestrians

*Light vehicles on request.

Standard colours: black, grey, beige

Production length: 4 m

