


Profiles for refurbishment, renovation and modernization

FN 110

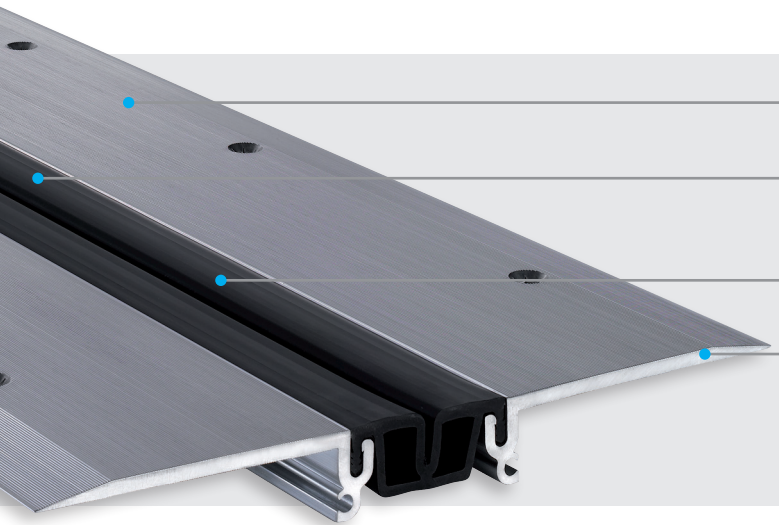


Anti-slip-surface ensures good skid resistance
Special Striated surface, also suitable for sports areas

Flexible MIGUFLEX insert
Suitable for sound insulation

Economical
Insert replaceable at any time

Very flat design
Perfect for surface fixing

Profile	Joint width min. b_{f min} [mm]	Total Movement Δb_f [mm]	Total width of profile [mm]	Visible width of profile b_t [mm]	Installation height min. h [mm]	Thickness of visible alu side plates [mm]	Load capacity  [KN]
FN 110	75	60 (± 30)	318	318	40	6,3	35

Installation instructions:

Any unevenness in the surface to which the profile is being fixed must be remedied by using an epoxy adhesive e.g. Reckli-Adhesive EP. Thereafter the aluminium brackets must be fixed on both sides with countersunk stainless steel screws e.g. Multi Monti type MMS-7,5 ES or similar, at 200 mm intervals.

Standard colours: black
Production length: 4 m

