


## Contraction joint system

### ESF 8 ES Solid Stainless Steel

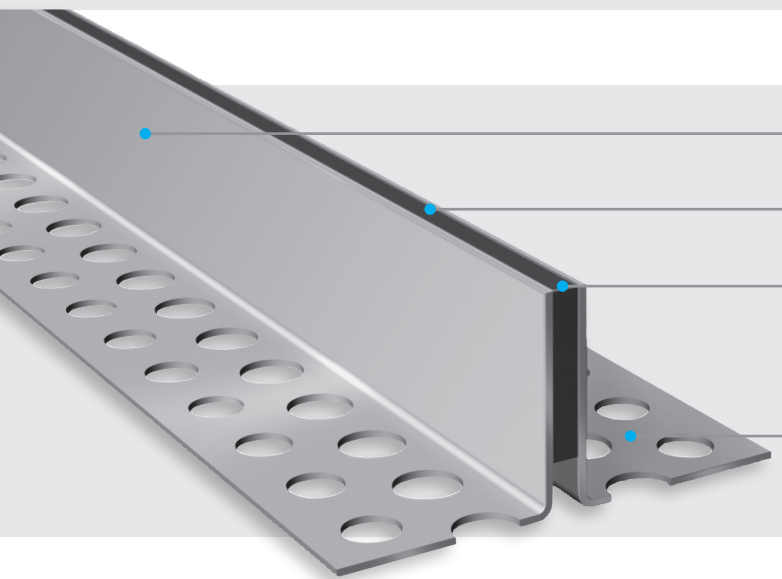

**High load capacity**

Solid stainless steel brackets, suitable for fork lift trucks

**Flexible (cellular rubber) insert**

Suitable for sound insulation

**Small visible surface**

Slim design, visible width of profile 8 mm only

**MultiHole mounting bracket**  
for secure fixing

Profile	Joint width max. <b>b<sub>f</sub> max</b> [mm]	Total Movement <b>Δb<sub>f</sub></b> [mm]	Visible width of profile <b>b<sub>s</sub></b> [mm]	Total width of profile <b>b<sub>t</sub></b> [mm]	Installation height <b>h</b> [mm]	Load capacity* [kN]	Load capacity [kN]
ESF 8/30 ES	5	2 (± 1)	8	85	30	300	35
ESF 8/35 ES	5	2 (± 1)	8	85	35	300	35
ESF 8/40 ES	5	2 (± 1)	8	85	40	300	35
ESF 8/50 ES	5	2 (± 1)	8	85	50	300	35

\*not designed for permanent use  
Larger heights on request.

Standard colours: grey Special colour: black

Production length: 3 m

