


Contraction joint systems

ESF 9 ZK

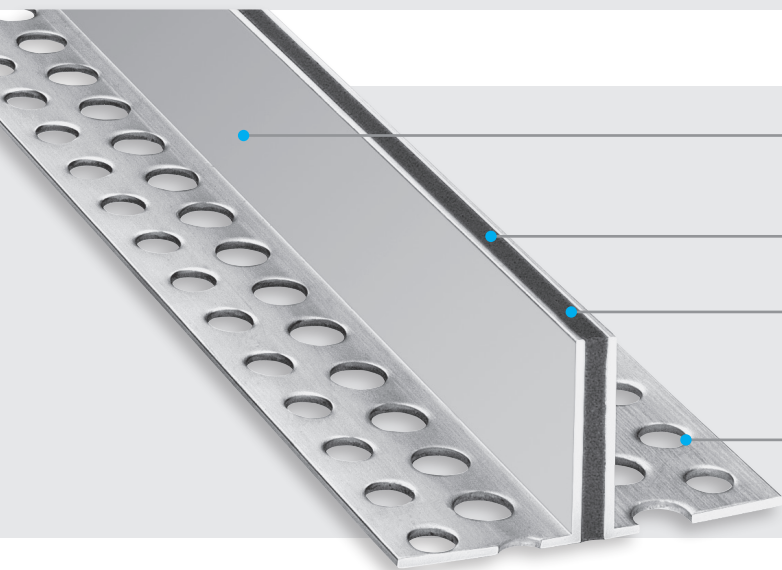

High load capacity

Solid aluminium brackets, suitable for fork lift trucks

Flexible (cellular rubber) insert



Suitable for sound insulation

Small visible surface

Slim design, visible width of profile 9 mm only

MultiHole mounting bracket

for secure fixing

Profile	Joint width max. b_f max [mm]	Total Movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Installation height h [mm]	Load capacity*  [kN]	Load capacity  [kN]
ESF 9/30 ZK	5	2 (± 1)	9	85	30	300	35
ESF 9/40 ZK	5	2 (± 1)	9	85	40	300	35
ESF 9/50 ZK	5	2 (± 1)	9	85	50	300	35

*not designed for permanent use
Larger heights on request.

Standard colours: grey Special colour: black

Production length: 3 m

