


Wall and ceiling profiles / plaster

D 15 / DE 15

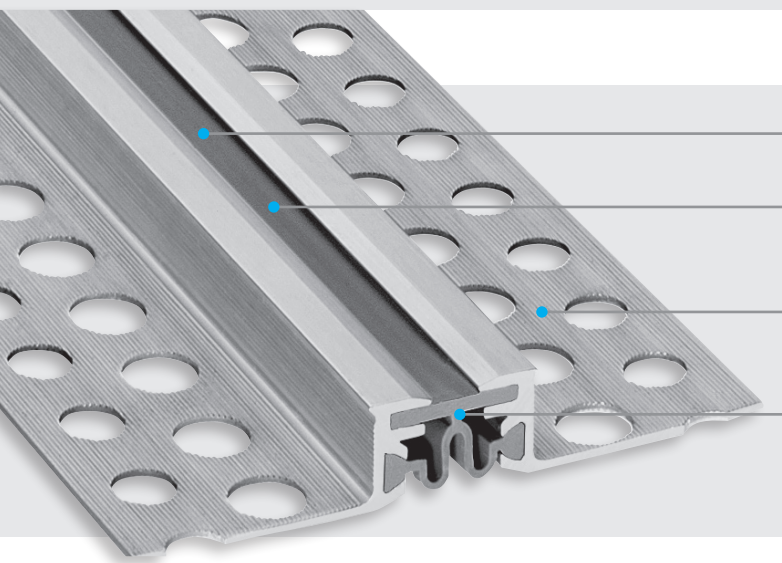

flexible high quality elastomeric insert

Hard wearing, temperature resistant (-30°C to +120°C), replaceable

Large movement capacity

Special flexible folded insert (up to 50 m length)

MultiHole mounting bracket

for secure fixing

Double protection against water


Due to double sliding of the sealing insert within the metal profiles

Profile for straight joints	Joint width max. b_f max [mm]	Total movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Install. height h [mm]
D 15/ 3	30	10 (\pm 5)	32	110	15
D 15/ 5	75	40 (\pm 20)	75	155	15
D 15/ 7	100	50 (\pm 25)	100	180	15
D 15/ 9	150	100 (\pm 50)	150	230	15
D 15/13	200	120 (\pm 60)	200	280	15
D 15/14	250	180 (\pm 90)	250	330	15
D 15/18	350	200 (\pm 100)	350	430	15

Profile for corner joints	Joint width max. b_f max [mm]	Total movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Install. height h [mm]
DE 15/ 4	30	10 (\pm 5)	22	76	15
DE 15/ 6	75	40 (\pm 20)	55	114	15
DE 15/ 8	100	50 (\pm 25)	80	139	15
DE 15/11	150	100 (\pm 50)	125	189	15
DE 15/15	200	120 (\pm 60)	190	239	15
DE 15/16	250	180 (\pm 90)	220	289	15
DE 15/22	350	200 (\pm 100)	390	389	15

Standard colours: grey, D 15/3 and DE 15/4 can also be supplied with a beige insert

Production length: 4 m

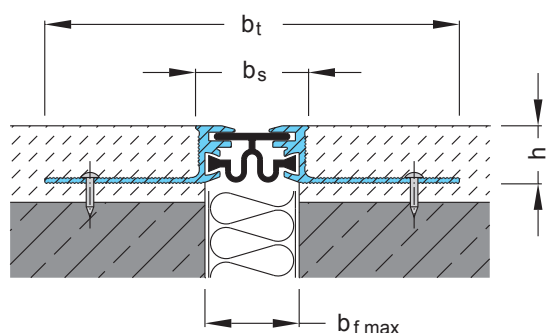

Insert for profile D 15/5 and DE 15/6



Insert for profile D 15/7 and DE 15/8



Insert for profile D 15/9 and DE 15/11



Insert for profile D 15/13 and DE 15/15