


Wall and ceiling profiles / plaster

D 20 / DE 20

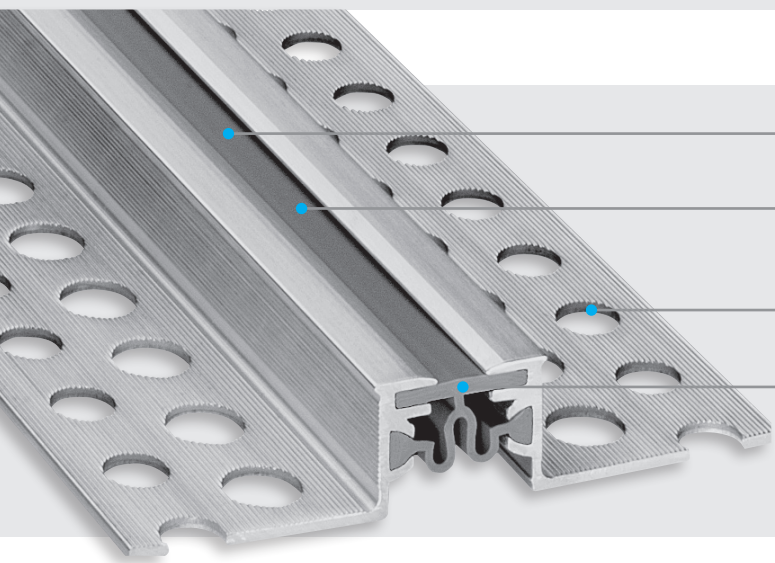

Flexible high quality elastomeric insert

Hard wearing, temperature resistant (-30°C to +120°C), replaceable

Large movement capacity

Special flexible folded insert (up to 50 m length)

MultiHole mounting bracket

for secure fixing

Double protection against water


Due to double sliding of the sealing insert within the metal profiles

Profile for straight joints	Joint width max. b_f max [mm]	Total movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Install. height h [mm]
D 20/ 3	30	10 (\pm 5)	40	111	20
D 20/ 5	75	40 (\pm 20)	75	160	20
D 20/ 7	100	50 (\pm 25)	100	180	20
D 20/ 9	150	100 (\pm 50)	150	230	20
D 20/13	200	120 (\pm 60)	200	280	20
D 20/14	250	180 (\pm 90)	250	330	20
D 20/18	350	200 (\pm 100)	350	430	20

Profile for corner joints	Joint width max. b_f max [mm]	Total movement Δb_f [mm]	Visible width of profile b_s [mm]	Total width of profile b_t [mm]	Install. height h [mm]
DE 20/ 4	30	10 (\pm 5)	25	81	20
DE 20/ 6	75	40 (\pm 20)	60	116	20
DE 20/ 8	100	50 (\pm 25)	85	141	20
DE 20/11	150	100 (\pm 50)	130	191	20
DE 20/15	200	120 (\pm 60)	180	241	20
DE 20/16	250	180 (\pm 90)	210	291	20
DE 20/22	350	200 (\pm 100)	380	391	20

Standard colours: grey, D 20/3 and DE 20/4 can also be supplied with a beige insert

Production length: 4 m

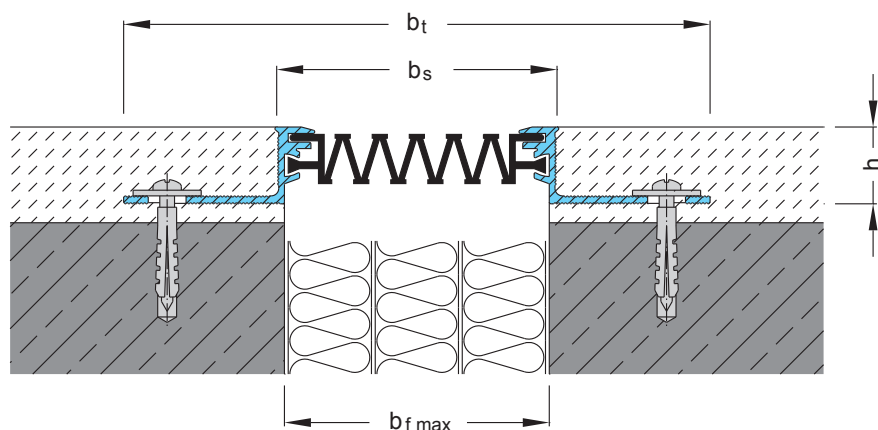

Insert for profile D 20/5 and DE 20/6



Insert for profile D 20/7 and DE 20/8



Insert for profile D 20/9 and DE 20/11



Insert for profile D 20/13 and DE 20/15