


Wall and ceiling profiles / Surface fixing

FA 12

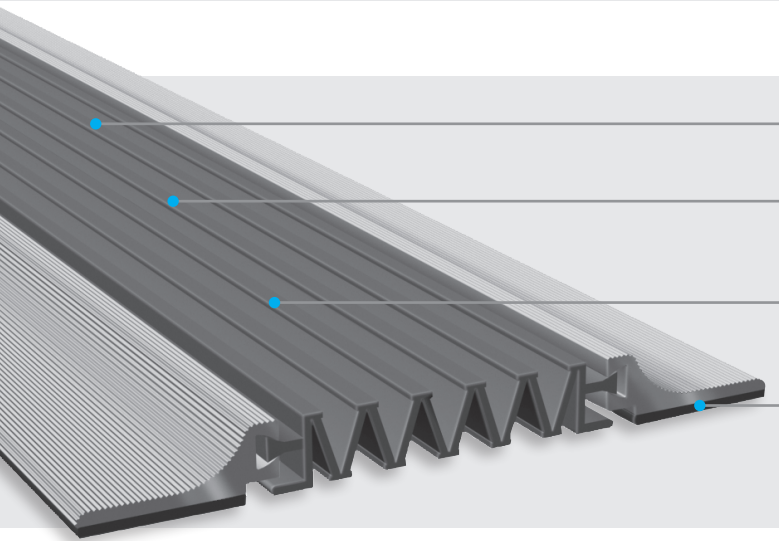

Flexible high quality elastomeric insert

Hard wearing, temperature resistant (-30°C to +120°C)

Large movement capacity

Special flexible folded insert for movement up to 200 mm

High flexibility of insert

Suitable for straight and corner joints

Quick and easy installation

Aluminium brackets with cellular rubber sealing strips to compensate for unevenness in the building surface

Profile	Joint width max. b_f max [mm]	Total Movement Δb_f [mm]	Total width of profile b_t [mm]	Installation height h [mm]
FA 12/ 5	75	40 (± 20)	132	12
FA 12/ 7	100	50 (± 25)	157	12
FA 12/ 9	150	100 (± 50)	207	12
FA 12/13	200	120 (± 60)	257	12
FA 12/14	250	180 (± 90)	307	12
FA 12/18	350	200 (± 100)	407	12

The profiles can also be supplied with countersunk holes for fixing with screws (distance 300 mm each).

If longer lengths than 4 m are required, exact details of total joint lengths must be stated.

The folded insert is then supplied in one piece up to approx. 50 m for the complete joint.

Standard colours: grey

Production length: 4 m

