

Wall and ceiling profiles

FB 20

High quality EPDM material

Hard wearing, temperature resistant (-30°C to +120°C)

Easy installation, secure fixing and good watertightness


by special design of the site barbs

High durability


due to excellent permanent elasticity of EPDM material

Excellent sound and thermal insulation

due to special cellular design of the profiles

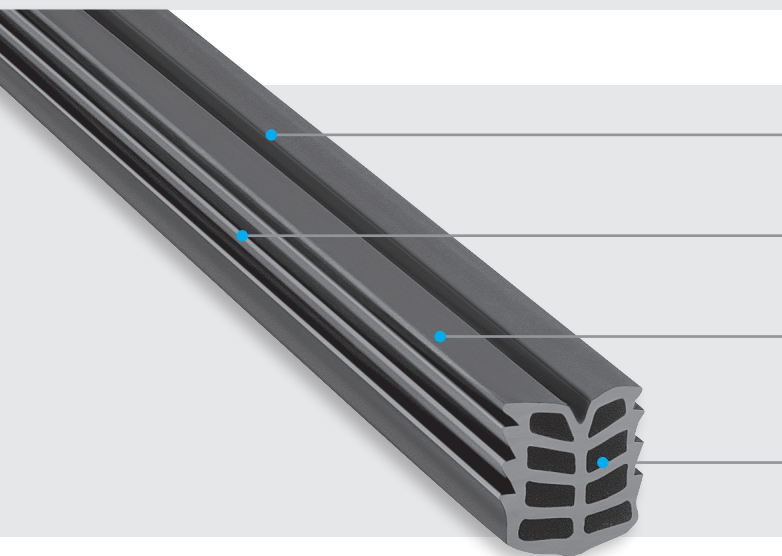


Profile	Nominal Joint width b_s [mm]	Depth of joint min. h_2 [mm]	Total movement [mm]
FB 20/1518	10	25	6
FB 20/1820	12	25	6
FB 20/2122	15	30	7
FB 20/2422	18	30	7
FB 20/3028	20	35	12
FB 20/4030	28	45	14
FB 20/5038	35	55	20
FB 20/6048	45	65	20

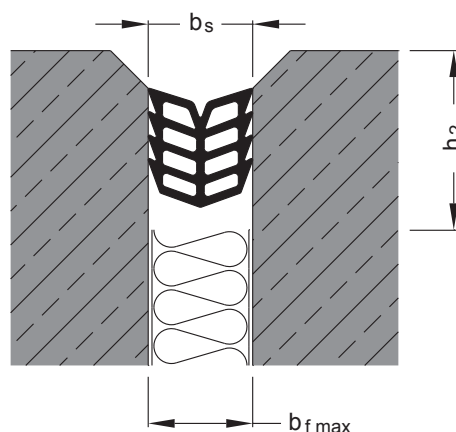


Standard colours: black, grey


Production length: 20 m




FB 20/1518




FB 20/1820




FB 20/2122




FB 20/2422




FB 20/3028



FB 20/4030



FB 20/5038



FB 20/6048