


PROSTYLE

KNURLED, ROUNDED STEP NOSING
NATURAL, POLISHED and CHROMED BRASS

PROSTYLE is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

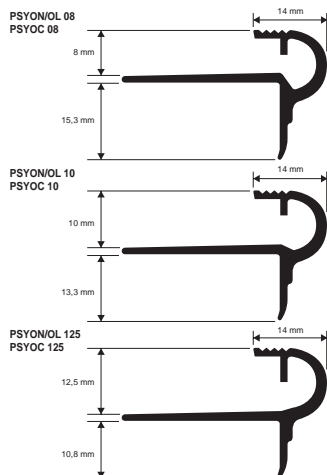

CHROMED BRASS - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm		
PSYOC 08	8		
PSYOC 10	10		
PSYOC 125	12,5		

COLOURS



POLISHED BRASS - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm		
PSYOL 08	8		
PSYOL 10	10		
PSYOL 125	12,5		


NATURAL BRASS - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm		
PSYON 08	8		
PSYON 10	10		
PSYON 125	12,5		

PROSTYLE

KNURLED, ROUNDED STEP NOSING
GOLD and SILVER ANODISED ALUMINIUM

PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodised aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

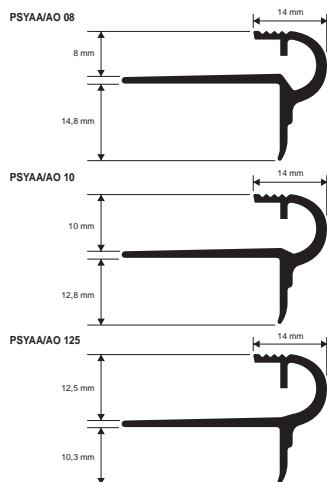


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1: Choose the PROSTYLE in the required width and colour according to the thickness of the tile. 2: First fix the riser part, placing it at the correct and final height. 3: Fill the empty spaces under the profile with the tile adhesive. 4: Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile. 5: Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.

Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidel-Smac).

COLOURS



SILVER ANODISED ALUMINIUM thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM


Article	H mm		
PSYAA 08	8		
PSYAA 10	10		
PSYAA 125	12,5		

GOLD ANODISED ALUMINIUM thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm		
PSYAO 08	8		
PSYAO 10	10		
PSYAO 125	12,5		

JOINTS and CAPS for Prostyle brass and aluminium

NATURAL, POLISHED and CHROMED BRASS - GOLD and SILVER ANODISED ALUMINIUM



JOINT - pack. 20 Pcs

Article			
RPSY... 08			
RPSY... 10			
RPSY... 125			

Available: ON - OL - OC - AA - AO. The code of the selected colour must be added to the article code. E.g.: RPSY... 08 (chosen colour Natural Brass) RPSYON 08.

CAPS H: 8 - 10 - 12,5 mm - pack. 20 Pcs

Article			
TPSY... 08			
TPSY... 10			
TPSY... 125			

Available: ON - OL - OC - AA - AO. The code of the selected colour must be added to the article code. E.g.: TPSY... 08 (chosen colour Natural Brass) TPSYON 08.



PROSTYLE is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. Elegant profile for all public/private environments.

In order to perfect placing and to look after details, external angles and closing caps are available.

PROSTYLE

ROUNDED STEP NOSING
STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - pack. 20 Pcs - 54 LM - 10/10mm

Article	H mm		
PSYAC 08	8		
PSYAC 10	10		
PSYAC 125	12,5		

COLOURS






AC - Polished stainless steel
AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1: Choose the "PROSTYLE" with suitable height for the thickness of the floor (stairs). 2: Apply the adhesive onto the area of application of the profile. 3: Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4: Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5: Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.



JOINTS and CAPS for Prostyle stainless steel


PAINTED PLASTIC STEEL EFFECT and STAINLESS STEEL

JOINT in PAINTED PLASTIC STEEL EFFECT - pack. 20 Pcs


Article			
RPSYAC 08			
RPSYAC 10			
RPSYAC 125			

CAPS in STAINLESS STEEL H: 8 - 10 - 12,5 mm - pack. 20 Pcs

Article			
TPSYAC 08			
TPSYAC 10			
TPSYAC 125			



RPSYAC 08/10/125



TPSYAC 08/10/125

PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in impact-resistant non-toxic PVC. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments.



NON-TOXIC IMPACT-RESISTANT VINYL RESIN

bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm		
PSYRV 08...	8		
PSYRV 10...	10		
PSYRV 125...	12,5		

Available in the colours: 01-03-04. The code of the selected colour must be added to the article code. E.g.: PSYRV 08... (colour White) PSYRV 08-01.


COLOURS



01 - White

03 - Cement grey

04 - Light beige



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1: Choose the "PROSTYLE" with suitable height for the thickness of the floor (stairs). 2: Apply the adhesive onto the area of application of the profile. 3: Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4: Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5: Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

PROSTYLE

ROUNDED STEP NOSING
NON-TOXIC IMPACT-RESISTANT VINYL RESIN

