


# PRO...CURVE LINE

PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc. The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.

## PROTERMINAL CURVE


STAINLESS STEEL AISI 304/1.4301-V2A  
CURVABLE

**PROTERMINAL CURVE** are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10 and 12.5 mm) in 2.7m bars.

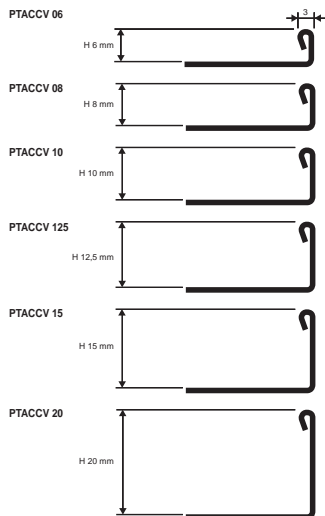

**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A**  
bar length 2.7 LM - packaging 40 Pcs - 108 LM - 10/10 mm

Article	H mm		
PTACCV 06	6		
PTACCV 08	8		
PTACCV 10	10		
PTACCV 125	12,5		
PTACCV 15	15		
PTACCV 20	20		




### COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

### EXAMPLES OF LAYING




### LAYING INSTRUCTIONS

1: Choose the PROTERMINAL CURVE with the required height and material. 2: Cut the profile to the necessary length, calculating the total length. 3: Bend the profile mechanically with the PROCURVE MACHINE. 4: If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile.





**PROTERMINAL CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.



**NATURAL BRASS thermo packed**  
bar length 2,7 LM - packaging 20 Pcs - 54 LM


Article	H mm		
PTONCV 06	6		
PTONCV 08	8		
PTONCV 10	10		
PTONCV 125	12,5		
PTONCV 15	15		
PTONCV 20	20		

#### COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

#### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1: Choose the PROTERMINAL CURVE in the required height and material.  
2: Cut the profile to the necessary length, calculating the total length.  
3: Bend the profile mechanically with the PROCURVE MACHINE. 4: If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.).  
If it is used as a joining profile, bring each floor to the edge of the profile.




## PROTERMINAL CURVE

NATURAL BRASS  
CURVABLE

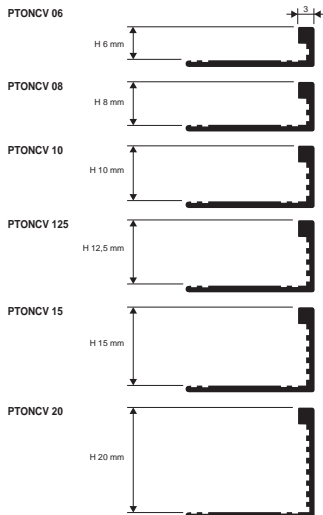


**PROTERMINAL CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural aluminium in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.



**NATURAL ALUMINIUM**  
bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm		
PTANCV 06	6		
PTANCV 08	8		
PTANCV 10	10		
PTANCV 125	12,5		
PTANCV 15	15		
PTANCV 20	20		


#### EXAMPLES OF LAYING (for laying instructions, see upstairs)



#### COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)



## PROTERMINAL CURVE

NATURAL ALUMINIUM  
CURVABLE

