


PROWALK ACC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
PUNCHED or SELF ADHESIVE

stair nosing for existing steps

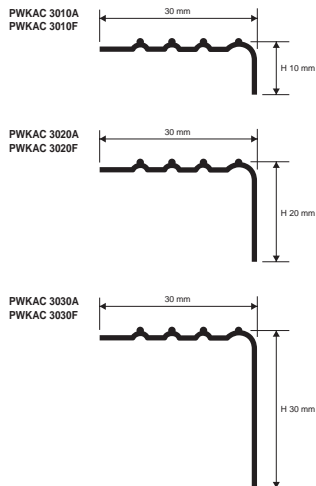

PROWALK is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version or with holes either with adhesive. Available sizes: 30 x 10, 30 x 20, e 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive
thermo packed - bar length 2,7 LM - pack. 40 Pcs - 108 LM - 10/10mm

Article	L x H mm		
PWKAC 3010A	30 x 10		
PWKAC 3020A	30 x 20		
PWKAC 3030A	30 x 30		



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched
bar length 2,7 LM - pack. 40 Pcs - 108 LM - 10/10mm

Article	L x H mm		
PWKAC 3010F	30 x 10		
PWKAC 3020F	30 x 20		
PWKAC 3030F	30 x 30		

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)




ON DEMAND HAND-BRUSHED
STAINLESS STEEL


PROWALK 2510 & 2520

GOLD, SILVER and BRONZE ANOD. ALUMINIUM
PUNCHED or SELF ADHESIVE

stair nosing for existing steps



EXAMPLES OF LAYING



ANODISED ALUMINIUM with adhesive - thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm		
PWK... 2510A	25 x 10		
PWK... 2520A	25 x 20		

ANODISED ALUMINIUM with adhesive - thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm		
PWK... 25109AS	25 x 10		

Available in the finish: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. Eg.: PWK... 2510A (chosen finish Anod. silver) PWKAA 2510A.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



ANODISED ALUMINIUM punched - thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm		
PWK... 2510F	25 x 10		
PWK... 2520F	25 x 20		

ANODISED ALU. punched with screws and screw anchors - thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm		
PWK... 25109FS	25 x 10		

ANODISED ALU. punched with screws and screw anchors - thermo packed
bar length 1,35 LM - pack. 20 Pcs

Article	L x H mm		
PWK... 251013FS	25 x 10		

Anod. titanium alu., Champagne and Sand AVAILABLE UPON REQUEST (with a minimum quantity order of 540 LM) and 27 wood finishes (see colours sheet)



PROWALK is a step nosing profile in polished brass and anodised aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or without holes. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped. Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

PROWALK

POLISHED BRASS and ANODISED ALUMINIUM
ADHESIVE and PUNCHED



KNURLED POLISHED BRASS with adhesive - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm		
PWKOL 22A	22 x 22		
PWKOL 30A	30 x 30		



KNURLED POLISHED BRASS punched
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm		
PWKOL 22F	22 x 22		
PWKOL 30F	30 x 30		

KNURLED POLISHED BRASS without holes - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm		
PWKOL 22	22 x 22		
PWKOL 30	30 x 30		

KNURLED POLISHED BRASS with adhesive - thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm		
PWKOL 229AS	22 x 22		
PWKOL 309AS	30 x 30		



KNURLED POLI. BRASS punched with screws and screw anchors - thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm		
PWKOL 309FS	30 x 30		



KNURLED ANODISED ALUMINIUM with adhesive - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm		
PWK... 22A	22 x 22		
PWK...30A	30 x 30		

KNURLED ANODISED ALUMINIUM punched - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm		
PWK... 22F	22 x 22		
PWK... 30F	30 x 30		

KNURLED ANODISED ALUMINIUM without holes - thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm		
PWK... 22	22 x 22		
PWK... 30	30 x 30		

KNURLED ANODISED ALUMINIUM with adhesive - thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm		
PWK... 229AS	22 x 22		
PWK... 309AS	30 x 30		



KNURLED ANOD. ALU. punched with screws and screw anchors - thermo packed
bar length 0,90 LM - pack. 20 Pcs


Article	H x L mm		
PWK... 229FS	22 x 22		
PWK... 309FS	30 x 30		




Available in the finish: AO - AA - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PWK... 22A (chosen finish Anod. Gold) PWKAO 22A.

COLOURS


(for a precise assessment of colours and finishes, see the relative enclosed sheet)



Anod. titanium alu., Champagne and Sand
AVAILABLE UPON REQUEST
(with a minimum quantity order of 540 LM)

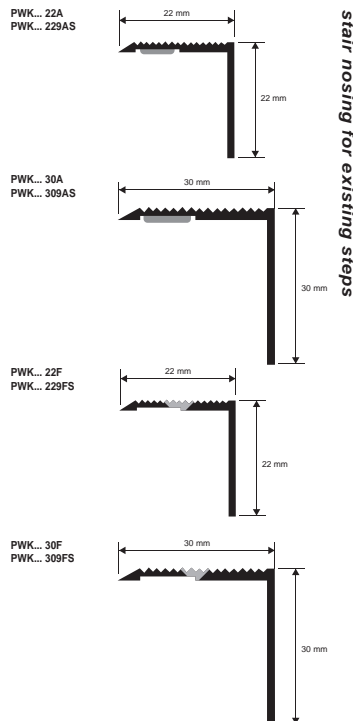

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1: Choose the suitable profile and cut it to the necessary length.
2: Degrease, wash and clean the solid surface thoroughly. 3: Remove the protective paper from the adhesive. 4: Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1: Choose the suitable profile and cut it to the necessary length.
2: Mark the position of the holes using the existing holes in the profile as reference. 3: Insert the screw anchors into the drilled holes. 4: Fix the profile using flathead screws suitable for the relative slots in the profile.