


TERMINAL PIN

TOP + PIN INSERT + ALUMINIUM BASE
27 wood finishes and 6 anodised finishes

terminal - outer profiles

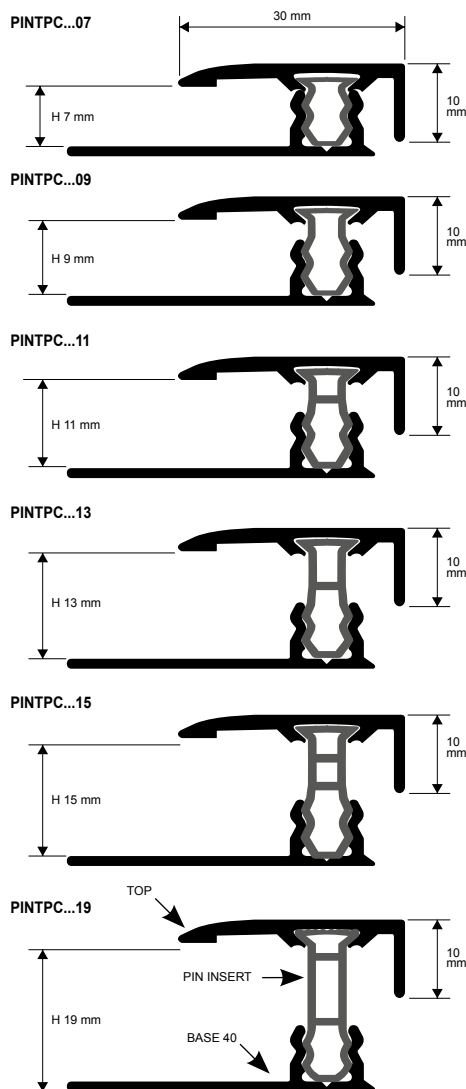

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting-board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 21 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.



ALU. TOP + PIN INSERT + ALU. BASE 40 PUNCHED/PERFORED
(6 anod. al. finishes of which 3 on demand) - bar length 2,7 LM - pack. 20 Pcs - 54 LM

| Article | H mm | | |
|-------------------------------------|---------|--|--|
| PINTPC... 07 (PIN insert 07) | 7 / 8 | | |
| PINTPC... 09 (PIN insert 09) | 9 / 10 | | |
| PINTPC... 11 (PIN insert 11) | 11 / 12 | | |
| PINTPC... 13 (PIN insert 13) | 13 / 14 | | |
| PINTPC... 15 (PIN insert 15) | 15 / 16 | | |
| PINTPC... 19 (PIN insert 19) | 19 / 21 | | |

ALU. TOP + PIN INSERT + ALU. BASE 40 PUNCHED/PERFORED
(27 wood finishes) - bar length 2,7 LM - pack. 20 Pcs - 54 LM

| Article | H mm | | |
|-------------------------------------|---------|--|--|
| PINTPC... 07 (PIN insert 07) | 7 / 8 | | |
| PINTPC... 09 (PIN insert 09) | 9 / 10 | | |
| PINTPC... 11 (PIN insert 11) | 11 / 12 | | |
| PINTPC... 13 (PIN insert 13) | 13 / 14 | | |
| PINTPC... 15 (PIN insert 15) | 15 / 16 | | |
| PINTPC... 19 (PIN insert 19) | 19 / 21 | | |

COMPLETE

Available in the finishes: AO - AA - AB - 01W - 02W - 03W - 04W - 05W - 06W - 07W - 08W - 09W - 10W - 11W - 12W - 13W - 14W - 15W - 16W - 17W - 18W - 19W - 20W - 21W - 22W - 23W - 24W - 25W - 26W - 27W (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PINTPC... 07 (chosen finish Anod. gold) PINTPCAO 07.

ALU. TOP + PIN INSERT + ALU. BASE 40 PUNCHED/PERFORED
(6 anod. al. finishes of which 3 on demand) - bar length 0,90 LM


| Article | H mm | | |
|--------------------------------------|---------|--|--|
| PINTPC... 07S (PIN insert 07) | 7 / 8 | | |
| PINTPC... 09S (PIN insert 09) | 9 / 10 | | |
| PINTPC... 11S (PIN insert 11) | 11 / 12 | | |
| PINTPC... 13S (PIN insert 13) | 13 / 14 | | |
| PINTPC... 15S (PIN insert 15) | 15 / 16 | | |
| PINTPC... 19S (PIN insert 19) | 19 / 21 | | |

ALU. TOP + PIN INSERT + ALU. BASE 40 PUNCHED/PERFORED
(27 wood finishes) - bar length 0,90 LM

| Article | H mm | | |
|--------------------------------------|---------|--|--|
| PINTPC... 07S (PIN insert 07) | 7 / 8 | | |
| PINTPC... 09S (PIN insert 09) | 9 / 10 | | |
| PINTPC... 11S (PIN insert 11) | 11 / 12 | | |
| PINTPC... 13S (PIN insert 13) | 13 / 14 | | |
| PINTPC... 15S (PIN insert 15) | 15 / 16 | | |
| PINTPC... 19S (PIN insert 19) | 19 / 21 | | |

Available in the finishes: AO - AA - AB - 01W - 02W - 03W - 04W - 05W - 06W - 07W - 08W - 09W - 10W - 11W - 12W - 13W - 14W - 15W - 16W - 17W - 18W - 19W - 20W - 21W - 22W - 23W - 24W - 25W - 26W - 27W (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish Anod. gold) PINTPCAO 07S.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

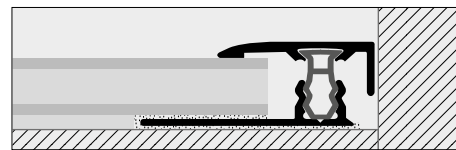

1: Fix PINBFTL 40 base at the outer edge/wall. 2: Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base. 3: Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific 'dovetail' seat. The position the profile above the U-shaped snap-in seat of the base. 4: With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

| ANODIZED | | | | | | | | | |
|--|------------------------|------------------------|-------------------------------|---------------------------|---------------------------|----------------------------|---------------------------|--|--|
| AVAILABLE MINIMUM QUANTITY 540 LM | | | | | | | | | |
| AO - Anod. gold aluminium | AA - Anod. silver alu. | AB - Anod. bronze alu. | AT - Anod. titanium aluminium | CH - Anod. Champagne alu. | SB - Anod. Sand aluminium | | | | |
| 01W - Light maple (ash-birch-dist. look) | 02W - Dark maple | 03W - Light beech | 04W - Dark beech | 05W - Light oak (strip) | 06W - Dark oak (walnut) | 07W - Light cherry (strip) | 08W - Dark cherry (board) | 09W - Red walnut (merbau-apple-walnut) | |
| 10W - Wenge (panga-panga - wenge) | 11W - Decaple bleached | 12W - Birch | 13W - Indonesian Teak | 14W - Coffee wood | 15W - Welsh Oak | 16W - Strip Oak | 17W - Teak sunset | 18W - Light Zerbano | |
| 19W - Dark Zerbano | 20W - Tobacco wood | 21W - Oak powder | 22W - White treated Oak | 23W - Cinnamon wood | 24W - European Oak | 25W - Bleached Fir | 26W - Rustic Oak | 27W - Albatros | |