


PROCOVER


POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

PROCOVER is a joint-cover profile in stainless steel (polished or satin finish) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

threshold - joint-cover profiles

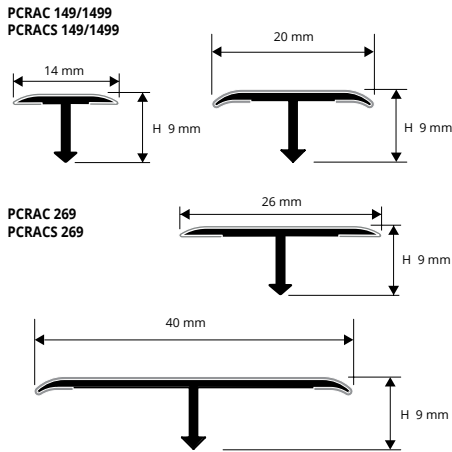

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

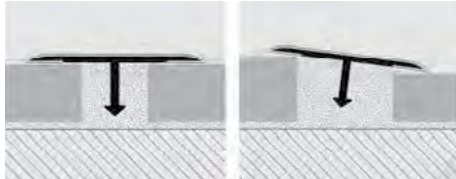

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm
(PCRAC 1499 - bar length 0,90 lm)



Article	L x H mm		
PCRAC 149 (Pack. 108 lm)	14 X 9		
PCRAC 1499 (Pack. 20 Pcs)	14 X 9		
PCRAC 209 (Pack. 40 Pcs)	20 X 9		
PCRAC 269 (Pack. 81 lm)	26 X 9		
PCRAC 409 (Pack. 20 Pcs)	40 X 9		

COLOURS



SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm
(PCRAC 1499 - bar length 0,90 lm - pack. 20 Pcs)



Article	L x H mm		
PCRAC 149 (Pack. 108 lm)	14 X 9		
PCRAC 1499 (Pack. 20 Pcs)	14 X 9		
PCRAC 209 (Pack. 40 Pcs)	20 X 9		
PCRAC 269 (Pack. 81 lm)	26 X 9		
PCRAC 409 (Pack. 20 Pcs)	40 X 9		


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCOVER


POLISHED, CHROMED AND ANTIQUE BRASS

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles

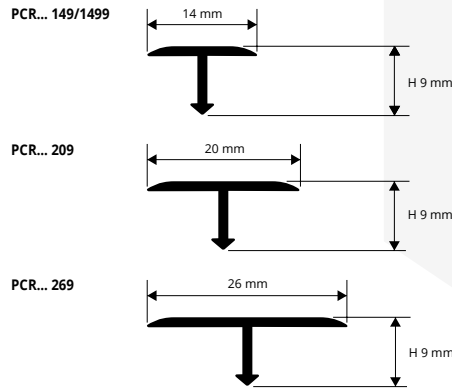

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

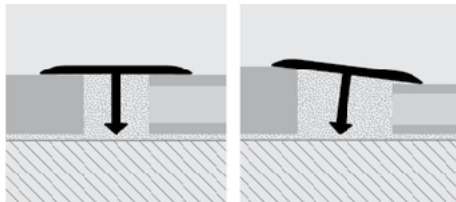

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed - bar length 2,7 lm
(PCROL 1499 - bar length 0,90 lm - pack. 40 Pcs)



Article	L x H mm		
PCROL 149 (Pack. 20 Pcs)	14 X 9		
PCROL 1499 (Pack. 40 Pcs)	14 X 9		
PCROL 209 (Pack. 20 Pcs)	20 X 9		
PCROL 269 (Pack. 20 Pcs)	26 X 9		

COLOURS



CHROMED BRASS (polished stainless st. effect) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm		
PCROC 149	14 X 9		
PCROC 209	20 X 9		
PCROC 269	26 X 9		

ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm		
PCROB 149	14 X 9		
PCROB 209	20 X 9		
PCROB 269	26 X 9		