


PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.


PROFLOOR 712

POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 


Article	L x H mm
PFRAC 7129AS	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs 


Article	L x H mm
PFRAC 71216AS	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PFRAC 712A	38 X 7/12


POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,83 lm - pack. 20 Pcs 

Article	L x H mm
PFRAC 7128AS	38 X 7/12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs 

Article	L x H mm
PFRAC 71210AS	38 X 7/12


COLOURS



On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PFRAC 712A/7128AS/7129AS/71210AS/71216AS

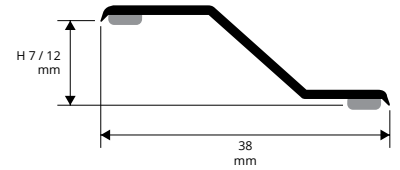

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

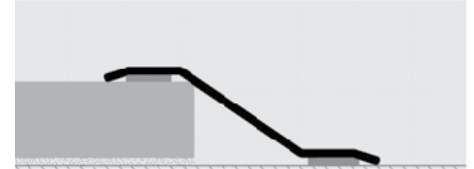


1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.


PROFLOOR 712

POLISHED BRASS
WITH SELF-ADHESIVE



POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs 


Article	L x H mm
PFROL 7129AS	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs 


Article	L x H mm
PFROL 71216AS	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PFROL 712A	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs 

Article	L x H mm
PFROL 7128AS	38 X 7/12

POLISHED BRASS self-adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs 


Article	L x H mm
PFROL 71210AS	38 X 7/12

COLOURS




OL - Polished brass

PFROL 712A/7128AS/7129AS/71210AS/71216AS

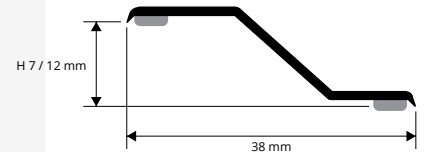

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

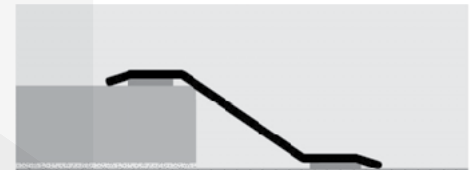

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 712


ANODIZED GOLD, SILVER AND BRONZE
ALUMINIUM WITH SELF-ADHESIVE



Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm
PFR... 712A	38 X 7/12



Anodized ALUMINIUM self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 


Article	L x H mm
PFR... 7129AS	38 X 7/12

PFR... 712A/7129AS

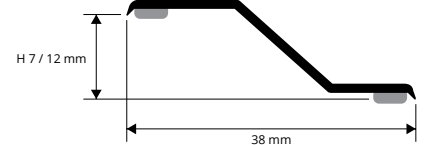

transition profiles

COLOURS



AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized Bronze Alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anod. sand aluminium (Price to be agreed. Production delay 4/5 weeks)

Available in the colours: AA - AO - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFR... 712A.