

**PROJOLLY QUART** is a quarter-circle rounded bead profile in polished, super polished and satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

# PROJOLLY QUART

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A



**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 30 Pcs - 10/10mm

Article	H mm
PJQTAC 045 (81 LM)	4,5
PJQTAC 06 (54 LM)	6

**SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed**  
bar length 2,7 lm - pack. 30 Pcs  
81 lm - 10/10mm


Article	H mm
PJQTACML 045	4,5
PJQTACML 06	6

**SATINATED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 30 Pcs - 81 lm - 10/10mm


Article	H mm
PJQTACS 045	4,5
PJQTACS 06	6

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PJQTAC/S 045  
PJQTACML 045  
PJQTAC/S 06



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

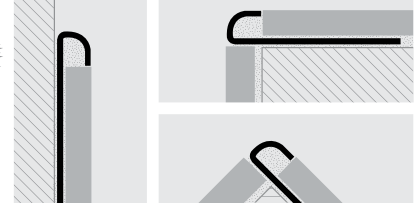

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

profiles for low thicknesses

### COLOURS



## CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED AND SATINATED STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

**CAPSULES and END CAPS - POLISHED STAINLESS STEEL**  
AISI 304/1.4301-V2A

Article	H mm
CPJQTAC 045/... (external)	4,5
IPJQTAC 045/... (internal)	4,5
TPJQTAC 045/... (end cap)	4,5

Choose the desired packaging. E.g.: CPJQTAC .../10 (Pack. 10 Pcs)  
CPJQTAC .../2 (Pack. 2 Pcs)

**CAPSULES SUPER POLISHED STAINLESS STEEL**  
AISI 304/1.4301-V2A

Article	H mm
CPJQTACML 045/... (external)	4,5
IPJQTACML 045/... (internal)	4,5

Choose the desired packaging. E.g.: CPJQTACML .../10 (Pack. 10 Pcs)  
CPJQTACML .../2 (Pack. 2 Pcs)

**CAPSULES and END CAPS - SATINATED STAINLESS ST. AISI 304/1.4301-V2A**

Article	H mm
CPJQTACS 045/... (external)	4,5
IPJQTACS 045/... (internal)	4,5
TPJQTACS 045/... (end cap)	4,5

Choose the desired packaging. E.g.: CPJQTACS .../10 (Pack. 10 Pcs)  
CPJQTACS .../2 (Pack. 2 Pcs)

**JOINTS - PLASTIC**

Article	H mm
GIJQT 045/...	4,5

Choose the desired packaging. E.g.: GIJQT .../10 (Pack. 10 Pcs)  
GIJQT .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES



CPJQTAC/S 045/...  
CPJQTACML 045/...

INTERNAL CAPSULES



IPJQTAC/S 045/...  
IPJQTACML 045/...

END CAP



TPJQTAC/S 045/...

JOINT



GIJQT 045/...

**PROJOLLY** is a rounded bead profile in anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in seven different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

# PROJOLLY

ANODIZED, POLISHED AND BRUSHED ALUMINIUM



**ANODISED ALUM. (silver-gold) thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PJAA 03 (anodised silver)	3
PJAO 03 (anodised gold)	3
PJAA 045 (anodised silver)	4,5
PJAO 045 (anodised gold)	4,5
PJAA 06 (anodised silver)	6
PJAO 06 (anodised gold)	6

**POLISHED BRUSHED ALUMINIUM (silver-copper-titanium) thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PJBS 03 (brushed silver)	3
PJRS 03 (brushed copper)	3
PJTS 03 (brushed titanium)	3
PJBS 045 (brushed silver)	4,5
PJRS 045 (brushed copper)	4,5
PJTS 045 (brushed titanium)	4,5

PJ... 03




PJ... 045



PJ... 06



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

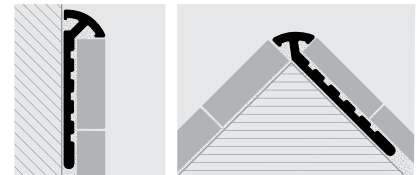

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

profiles for low thicknesses

### COLOURS



\* = On demand, price and delivery time to be agreed.