

PROJOLLY SQUARE is a square corner bead profile in polished, super polished, satin finish stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY SQUARE

POLISHED, SUPER POLISHED AND SATIN FINISH STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm			
PJQAC 045 (108 lm)	4,5			
PJQAC 06 (54 lm)	6			

SATIN STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm			
PJQACS 045	4,5			
PJQACS 06	6			

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.




SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
thermo packed - bar length 2,7 lm - pack. 40 Pcs
108 lm - 8/10mm


Article	H mm			
PJQACML 045	4,5			
PJQACML 06	6			

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACML - Super polished stainless steel AISI 304/1.4301-V2A	ACS - Satin finish stainless steel AISI 304/1.4301-V2A

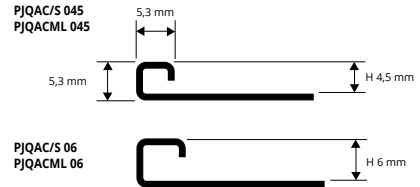

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

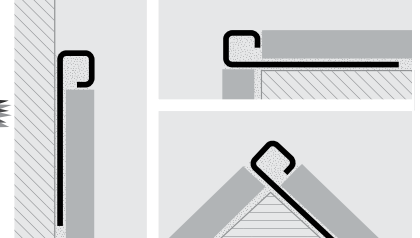

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

profiles for low thicknesses

CAPSULES, END CAPS and JOINTS

POLISHED, SUPER POLISHED AND SATIN STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm			
CPJQAC 045/...	4,5			
TPJQAC 045/...	4,5			
CPJQAC 06/...	6			
TPJQAC 06/...	6			

Choose the desired packaging. E.g.: CPJQAC .../10 (Pack. 10 Pcs)
CPJQAC .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm			
CPJQACML 045/...	4,5			
CPJQACML 06/...	6			

Choose the desired packaging. E.g.: CPJQACML .../10 (Pack. 10 Pcs)
CPJQACML .../2 (Pack. 2 Pcs)



CAPSULE
CPJQAC 045/...
CPJQAC/ML 045/...



JOINT
GIJQ 045/...



END CAP
TPJQAC/S 045/...

CAPSULES and END CAPS - SATIN STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm			
CPJQACS 045/...	4,5			
TPJQACS 045/...	4,5			
CPJQACS 06/...	6			
TPJQACS 06/...	6			

Choose the desired packaging. E.g.: CPJQACS .../10 (Pack. 10 Pcs)
CPJQACS .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm			
GIJQ 045/...	4,5			
GIJQ 06/...	6			

Choose the desired packaging. E.g.: GIJQ .../10 (Pack. 10 Pcs)
GIJQ .../2 (Pack. 2 Pcs)

