


# PROJOLLY TRIANGLE

NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS

**PROJOLLY TRIANGLE** is a triangle-shaped bead profile in brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in different finishes make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

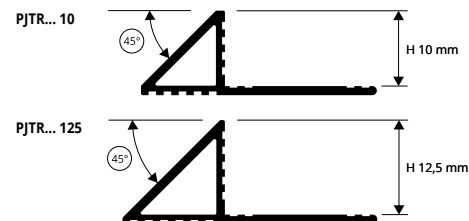

**NATURAL BRASS thermo packed**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PJTRON 10	10
PJTRON 125	12,5

**SUPER POLISHED CHROMED BRASS**  
thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm



Article	H mm
PJTROC 10	10
PJTROC 125	12,5


**POLISHED VARNISHED BRASS thermo packed**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PJTROL 10	10
PJTROL 125	12,5

**ANTIQUÉ BRASS thermo packed**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PJTROB 10	10
PJTROB 125	12,5

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

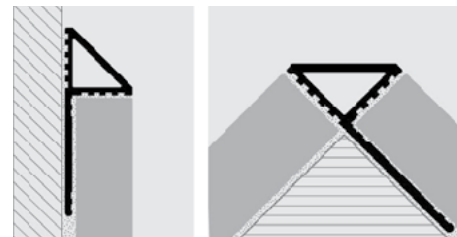

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

## COLOURS



ON - Natural brass    OL - Polished brass    OC - Chromed brass    OB - Antique brass

