


PROLEVAL 305


POLISHED STAINLESS STEEL 1.4016 AND POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

PROLEVAL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.

transition profiles

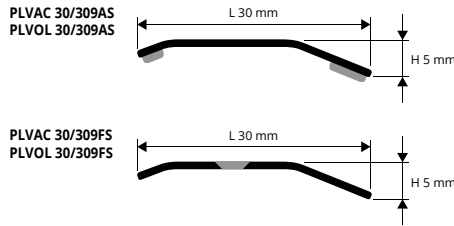

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

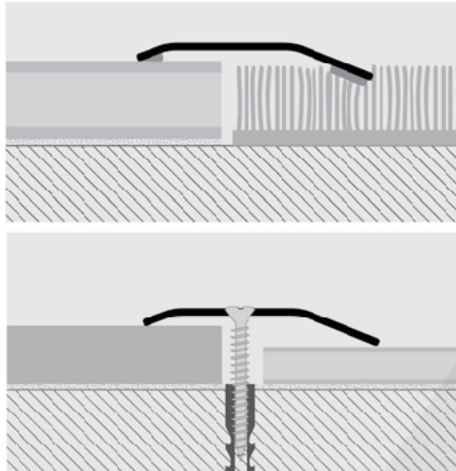

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


| Article | H x L mm |
|-----------|----------|
| PLVAC 30A | 5 X 30 |

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs 

| Article | H x L mm |
|-------------|----------|
| PLVAC 309AS | 5 X 30 |

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | H x L mm |
|-----------|----------|
| PLVOL 30A | 5 X 30 |


POLISHED BRASS with adhesive thermo packed 
bar length 0,93 lm - pack. 20 Pcs

| Article | H x L mm |
|-------------|----------|
| PLVOL 309AS | 5 X 30 |



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm


| Article | H x L mm |
|-----------|----------|
| PLVAC 30F | 5 X 30 |

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs 

| Article | H x L mm |
|-------------|----------|
| PLVAC 309FS | 5 X 30 |

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | H x L mm |
|-----------|----------|
| PLVOL 30F | 5 X 30 |

POL. BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs 

| Article | H x L mm |
|-------------|----------|
| PLVOL 309FS | 5 X 30 |

COLOURS




ON DEMAND HAND-BRUSHED STAINLESS STEEL
(Price to be agreed. Production delay 4/5 weeks)

PROLEVAL 32


ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

PROLEVAL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVAL 32** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

transition profiles

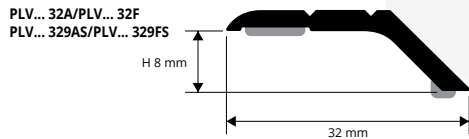

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

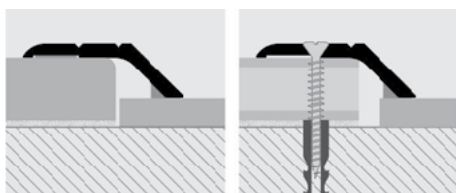

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article | L x H mm |
|----------------------------|----------|
| PLV... 32A (with adhesive) | 32 X 8 |
| PLV... 32F (punched) | 32 X 8 |

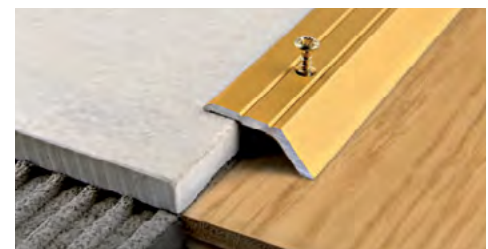


ANODIZED SILVER and GOLD ALUMINIUM thermo packed - bar length 0,93 lm - pack. 20 Pcs 


| Article | L x H mm |
|------------------------------|----------|
| PLV... 329AS (with adhesive) | 32 X 8 |
| PLV... 329FS (punched) | 32 X 8 |

Available in the colours: AA - AO (AB - AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)