


# PROPLATE

POLISHED STAINLESS 1.4016 STEEL  
SELF-ADHESIVE OR PUNCHED

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

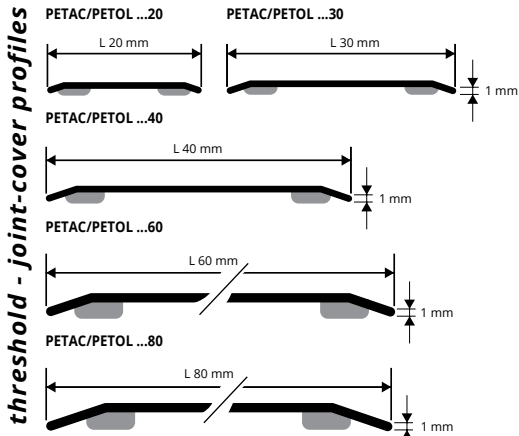

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing.
2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°.
3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.
4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference.
5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors)
6. Align the profile and tighten the galvanised or brassed flathead screws.



POLISHED STAINLESS 1.4016 ST. thermo packed  
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm)

| Article                   | Width - Thick. |  |  |
|---------------------------|----------------|--|--|
| PETAC 20A (with adhesive) | 20mm - 10/10   |  |  |
| PETAC 30A (with adhesive) | 30mm - 10/10   |  |  |
| PETAC 40A (with adhesive) | 40mm - 10/10   |  |  |
| PETAC 60A (with adhesive) | 60mm - 10/10   |  |  |
| PETAC 80A (with adhesive) | 80mm - 10/10   |  |  |

POLISHED STAINLESS 1.4016 STEEL thermo packed  
bar length 2,70 lm - pack. 20 Pcs - 54 lm


| Article                  | Width - Thick. |  |  |
|--------------------------|----------------|--|--|
| PETAC 60 (without holes) | 60mm - 10/10   |  |  |
| PETAC 80 (without holes) | 80mm - 10/10   |  |  |

PETAC 60A/80A/60/80, with 12/10 thickness available on demand.

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film  
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm)

| Article             | Width - Thick. |  |  |
|---------------------|----------------|--|--|
| PETAC 30F (punched) | 30mm - 10/10   |  |  |
| PETAC 40F (punched) | 40mm - 10/10   |  |  |



POLISHED STAINLESS 1.4016 ST. thermo packed  
bar length 0,93 lm - pack. 20 Pcs 

| Article   | Width - Thick. |  |  |
|---|----------------|--|--|
| PETAC 309AS (with adhesive)                         | 30mm - 10/10   |  |  |
| PETAC 309FS (punched with screws and screw anchors) | 30mm - 10/10   |  |  |
| PETAC 609AS (with adhesive)                         | 60mm - 10/10   |  |  |
| PETAC 809AS (with adhesive)                         | 80mm - 10/10   |  |  |


### COLOURS



# PROPLATE

POLISHED BRASS  
SELF-ADHESIVE OR PUNCHED

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

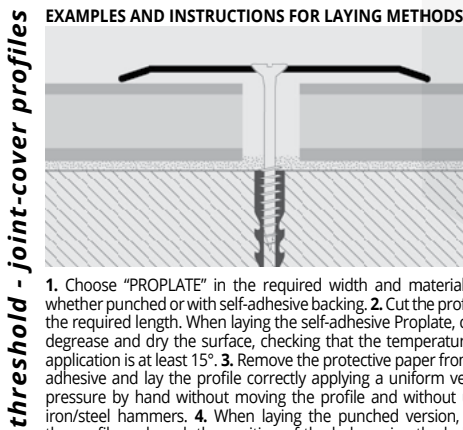

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing.
2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°.
3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.
4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference.
5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors)
6. Align the profile and tighten the galvanised or brassed flathead screws.

### COLOURS



POLISHED BRASS thermo packed  
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm)

| Article                   | Width - Thick. |  |   |
|---------------------------|----------------|--|---|
| PETOL 20A (with adhesive) | 20mm - 10/10   |  |   |
| PETOL 30A (with adhesive) | 30mm - 10/10   |  |   |
| PETOL 40A (with adhesive) | 40mm - 10/10   |  |   |
| PETOL 60A (with adhesive) | 60mm - 10/10   |  | * |
| PETOL 80A (with adhesive) | 80mm - 10/10   |  | * |

POLISHED BRASS thermo packed  
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm)

| Article                  | Width - Thick. |  |   |
|--------------------------|----------------|--|---|
| PETOL 20 (without holes) | 20mm - 10/10   |  | * |
| PETOL 60 (without holes) | 60mm - 10/10   |  | * |
| PETOL 80 (without holes) | 80mm - 10/10   |  | * |

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

POLISHED BRASS with protective film  
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

| Article             | Width - Thick. |  |   |
|---------------------|----------------|--|---|
| PETOL 30F (punched) | 30mm - 10/10   |  | * |
| PETOL 40F (punched) | 40mm - 10/10   |  | * |

POLISHED BRASS thermo packed  
bar length 0,83 lm - pack. 20 Pcs 

| Article                     | Width - Thick. |  |   |
|-----------------------------|----------------|--|---|
| PETOL 308AS (with adhesive) | 30mm - 10/10   |  | * |
| PETOL 408AS (with adhesive) | 40mm - 10/10   |  | * |

POLISHED BRASS thermo packed  
bar length 0,93 lm - pack. 20 Pcs 

| Article   | Width - Thick. |  |   |
|---|----------------|--|---|
| PETOL 309AS (with adhesive)                         | 30mm - 10/10   |  |   |
| PETOL 309FS (punched with screws and screw anchors) | 30mm - 10/10   |  |   |
| PETOL 409AS (with adhesive)                         | 40mm - 10/10   |  |   |
| PETOL 409FS (punched with screws and screw anchors) | 40mm - 10/10   |  | * |
| PETOL 609AS (with adhesive)                         | 60mm - 10/10   |  | * |
| PETOL 809AS (with adhesive)                         | 80mm - 10/10   |  | * |

POLISHED BRASS thermo packed  
bar length 1,03 lm - pack. 20 Pcs 

| Article  | Width - Thick. |  |   |
|--|----------------|--|---|
| PETOL 3010AS (with adhesive)                         | 30mm - 10/10   |  |   |
| PETOL 4010AS (with adhesive)                         | 40mm - 10/10   |  |   |
| PETOL 4010FS (punched with screws and screw anchors) | 40mm - 10/10   |  | * |

POLISHED BRASS thermo packed  
bar length 1,66 lm - pack. 20 Pcs 

| Article                      | Width - Thick. |  |   |
|------------------------------|----------------|--|---|
| PETOL 3016AS (with adhesive) | 30mm - 10/10   |  | * |
| PETOL 4016AS (with adhesive) | 40mm - 10/10   |  | * |

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed