

PROTECT T is a profile designed to protect edges and angles of low thickness (3/4.5 mm) coverings. It prevents chipping panel, door, and kitchen countertop edges with thin L-shaped profiles.




ANODISED SILVER and CHROMED POLISHED ALUMINIUM
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L mm		
PTTAA 22	22		
PTTBC 22	22		
PTTAA 91	91		
PTTBC 91	91		

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AVAILABLE ALSO IN THE OTHER FINISHINGS OF ALUMINIUM
(minimum quantity order of 500 LM)


INSTRUCTIONS FOR LAYING METHODS

1: Choose the PROTECT T of the required type and colour. 2: Drill and fasten it to the panel and/or substrate by means of screws. 3: Spread glue in the area where the covering will be laid. 4: Cut the covering and lay it in such a way that the upper part of the profile closes flush. 5: Fill the contact area between the profile and tile with sealant to prevent water from collecting into the empty spaces.

PROTECT T


ANODISED SILVER and CHROMED POLISHED ALUMINIUM

PTT... 22




profiles for top

PTT... 91

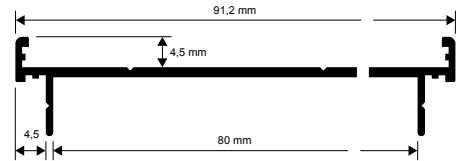

EXEMPLES OF LAYING

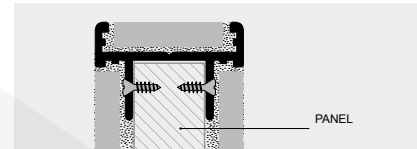

PROTECT Q is a profile designed to protect edges and angles of low thickness (3/4.5 mm) coverings. It prevents chipping panel, door, and kitchen countertop edges with squared profiles.




ANODISED SILVER and CHROMED POLISHED ALUMINIUM
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L mm		
PTQAA 22	22		
PTQBC 22	22		
PTQAA 91	91		
PTQBC 91	91		

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AVAILABLE ALSO IN THE OTHER FINISHINGS OF ALUMINIUM
(minimum quantity order of 500 LM)


INSTRUCTIONS FOR LAYING METHODS

1: Choose the PROTECT Q of the required type and colour. 2: Drill and fasten it to the panel and/or substrate by means of screws. 3: Spread glue in the area where the covering will be laid. 4: Cut the covering and lay it in such a way that the upper part of the profile closes flush. 5: Fill the contact area between the profile and tile with sealant to prevent water from collecting into the empty spaces.


PROTECT Q

ANODISED SILVER and CHROMED POLISHED ALUMINIUM

PTQ... 22



PTQ... 91

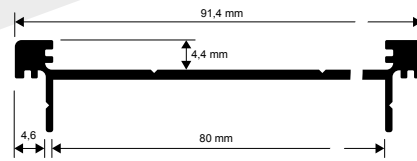

EXEMPLES OF LAYING

