

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.

PROTERMINAL

CHROMED BRASS AND ANTIQUE BRASS



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTOC 06	6		
PTOC 08	8		
PTOC 10	10		
PTOC 125	12,5		

COLOURS

OC - Chromed brass	OB - Antique brass




ANTIQU BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PTOB 08	8		
PTOB 10	10		
PTOB 125	12,5		

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

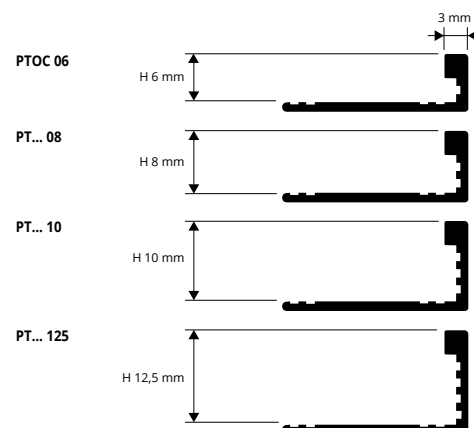

EXAMPLES OF LAYING

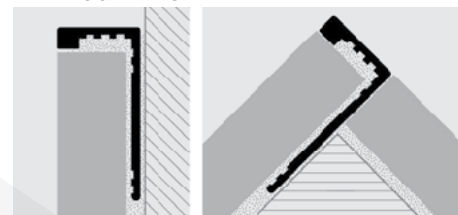

PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM



ANODIZED ALUMINIUM (gold - silver) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTAO 03 (anodized gold)	3		
PTAA 03 (anodized silver)	3		
PTAO 045 (anodized gold)	4,5		
PTAA 045 (anodized silver)	4,5		
PTAO 06 (anodized gold)	6		
PTAA 06 (anodized silver)	6		
PTAO 08 (anodized gold)	8		
PTAA 08 (anodized silver)	8		
PTAO 10 (anodized gold)	10		
PTAA 10 (anodized silver)	10		
PTAO 11 (anodized gold)	11		
PTAA 11 (anodized silver)	11		
PTAO 125 (anodized gold)	12,5		
PTAA 125 (anodized silver)	12,5		
PTAA 15 (anodized silver)	15		
PTAA 20 (anodized silver)	20		

COLOURS

ANODIZED		
AA - Anodized silver alum.	AO - Anod. gold alum.	NE - Anodized black alum.
AT - Anodized titanium alum.	AR - Anodized copper alum.	AB - Anodized bronze
BRA - Anod. antique bronze		



ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTAT 08 (anodized titanium)	8		
PTAR 08 (anodized copper)	8		
PTNE 08 (anodized black)	8		
PTAB 08 (anodized. bronze)	8		
PTAT 10 (anodized titanium)	10		
PTAR 10 (anodized copper)	10		
PTNE 10 (anodized black)	10		
PTAB 10 (anodized bronze)	10		
PTBRA 10 (anod. antique bronze)	10		
PTAT 11 (anodized titanium)	11		
PTAT 125 (anodized titanium)	12,5		
PTAR 125 (anodized copper)	12,5		
PTNE 125 (anodized black)	12,5		
PTAB 125 (anodized. bronze)	12,5		
PTBRA 125 (anod. antique bronze)	12,5		

NATURAL ALUMINIUM


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm		
PTAN 03 (natural)	3		
PTAN 045 (natural)	4,5		


COLOURS

AN - Natural aluminium

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimal quantity, timing and price.

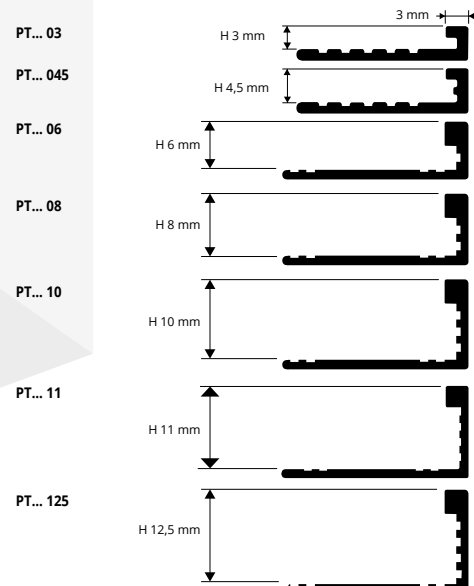

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

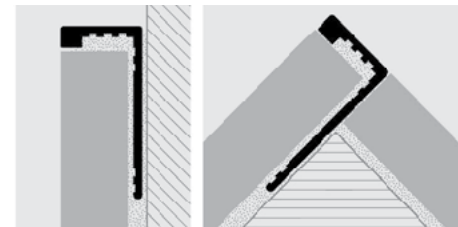

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.