


PRONIVO

ANODIZED ALUMINIUM


PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

PNV... 713A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

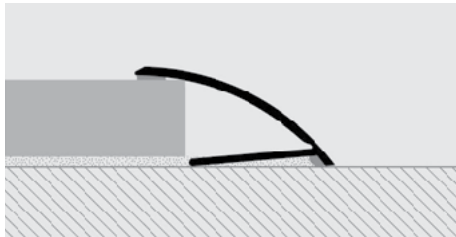

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length **2,7 lm** - pack. **30 Pcs - 81 lm**


| Article | H mm |
|-------------------|-------------|
| PNVAA 713A | 7/13 |

Available in the colours: AA (AO available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PNV... 713 (chosen colour anodized gold alum.) PNVAO 713A.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)


PROTRANS

ANODIZED ALUMINIUM


PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles

PTS... 613A
PTS... 6139AS

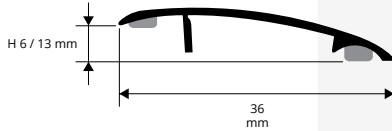

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

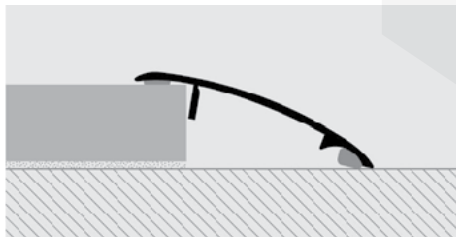

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

| Article | H mm |
|-------------------|---------------|
| PTSAA 613A | 6 / 13 |

Available in the colours: AA (AO, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PTS... 613A (chosen colour anodized gold alum.) PTSAO 613A.

ANODIZED ALUMINIUM self-adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs**



| Article | H mm |
|----------------------|---------------|
| PTS... 6139AS | 6 / 13 |

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)