

PROSKIRTING ISP is a joint, inspectional "cable duct" baseboard in aluminium, conceived and designed to hide and protect the passage of electric cables, the ones for computer, telephones and other plants as well, allowing an easy and quick access. The supports that are to be fixed on the wall consent accommodate different utility wires/cables as well. Aesthetically pleasant, it is recommended for various public and private environments: offices, schools, residences, commercial centers etc. Available in silver anodized aluminium (H: 100 mm) and in polished titanium and brushed titanium aluminium (H: 70 mm). In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

PROSKIRTING ISP

SILVER ANODIZED ALUMINIUM, TITANIUM POLISHED AND BRUSHED ALUM. (H:70 MM)



SKIRTING ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm
(H: 100 mm - 40 lm)

Article	H mm
PKISPAA 70	70
PKISPAA 100	100

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

SKIRTING POLISHED TITANIUM ALUMINIUM
thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm


Article	H mm
PKISPBT 70	70

SKIRTING POLISHED BRUSHED TITANIUM ALUMINIUM
thermo packed - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
PKISPTS 70	70

UPON REQUEST AVAILABLE IN H 100mm (MINIMUM QUANTITY 200 lm)
Skirtings in polished brushed titanium aluminium match with capsules and joints in varnished PVC with polished titanium aluminium effect (see below).


COLOURS



PUNCHED SUPPORT
support length 2 cm - pack. 10 Pcs

Article	H mm
PKGS 55	55

ARTICLES NOT FOR SALE SINGLY

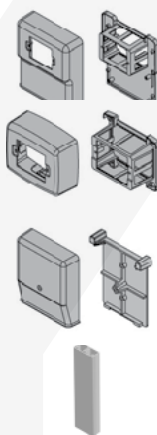

POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article
SPA 1820

SWITCH BOX
with BOX BASIS

Article
SI 1410

JUNCTION BOX
with FASTENING BASIS

Article
SD 1210


VERTICAL CABLE DUCT PROFILE
bar length 2,7 lm

Article
PSPV


It matches with CSPPK 80. Pag. 197.

LAYING INSTRUCTIONS

1. Choose "PROSKIRTING ISP" in the desired finish and height.
2. Fix the punched support to the wall with screws every 50 cm.
3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV.
4. Attach the profile to the support applying low pressure.

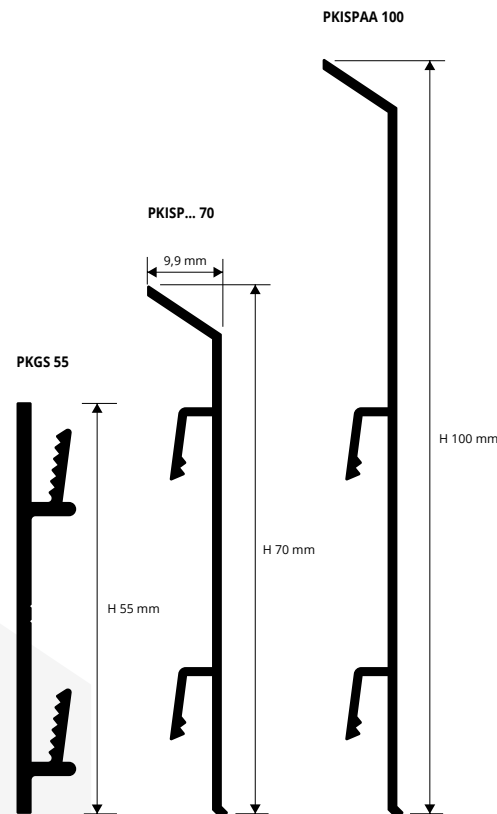

EXAMPLES OF LAYING

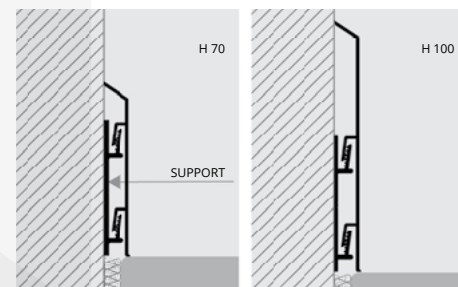

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (finishes anodized silver, polished titanium)

IN/EXTERNAL CORNER - VARNISHED PLASTIC anod. silver - pack. 5 Pcs

Article	H x L mm
PKIAGI 70 (internal)	70 x 24
PKIAGE 70 (external)	70 x 5
PKIAGI 100 (internal)	100 x 24
PKIAGE 100 (external)	100 x 5

JOINTS - VARNISHED PLASTIC anod. silver - pack. 10 Pcs

Article	H mm
PKIGIN 70	70
PKIGIN 100	100

END CAPS R / L - VARNISHED PLASTIC ANOD. silver - pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKITDSAA 70/5	70
PKITDSAA 100/5	100

IN/EXTERNAL CORNER - VARNISHED PLASTIC polished titanium - pack. 5 Pcs

Article	H x L mm
PKIAGIBT 70 (internal)	70 X 24
PKIAGEBT 70 (external)	70 X 5


JOINTS - VARNISHED PLASTIC polished titanium - pack. 10 Pcs

Article	H mm
PKIGINBT 70	70

END CAPS R / L - VARNISHED PLASTIC poli. titanium - pack. 10 Pcs (5 right and 5 left)


Article	H mm
PKITDSBT 70/5	70

Available on demand aluminium prewelded internal and external flush corners. Price to be agreed. Production delay 4/5 weeks.

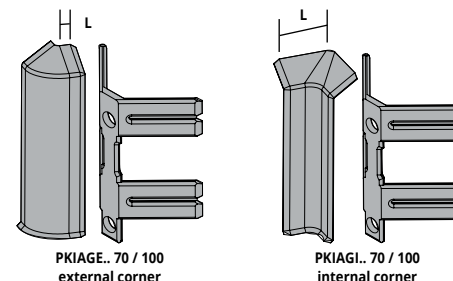


PKIAGE.. 70 / 100 external corner

PKIAGI.. 70 / 100 internal corner



PKIGIN.. 70 / 100 joint



PKITDS.. 70 / 100/5 end caps



* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed