
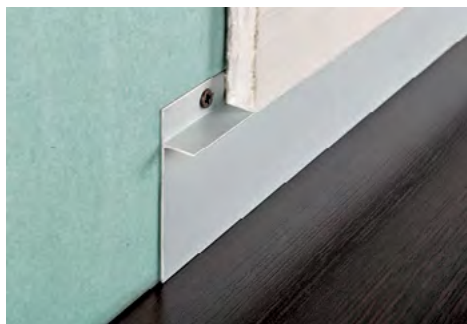


PROSKIRTING INS

ANODIZED SILVER ALUMINIUM

PROSKIRTING INS is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a recessed skirting for a modern and minimalist design in line with the latest trends.

PKINSAA 60

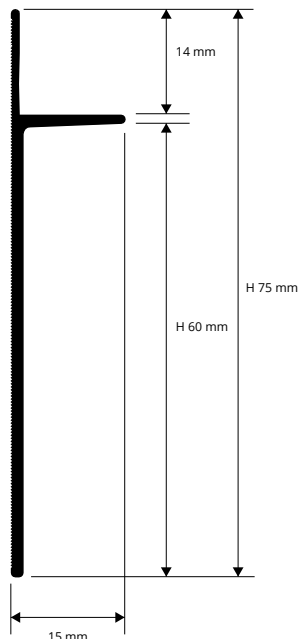


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H x L mm
PKINSAA 60	60 X 15


ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

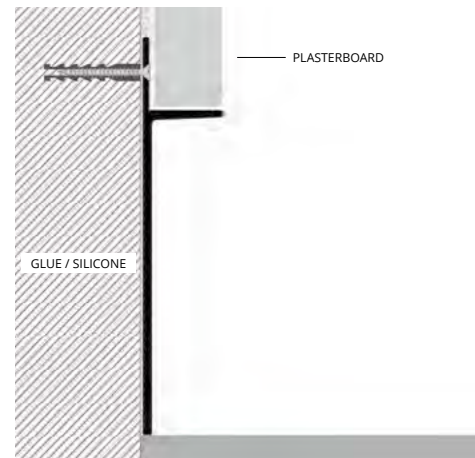

1. Fix "PROSKIRTING INS" using screws (concealed part) and glue/silicone (exposed side), before laying the plasterboard, calculating all the heights and distance. 2. Lay the plasterboard aligning the lower part flush to the "PROSKIRTING INS". 3. Plaster and carry out the surface finishing on the plasterboard.



IMPORTANT: Pay attention to the external edges of the aluminium "Proskirting". They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

PROSKIRTING LINE

ANODIZED SILVER ALUMINIUM

PROSKIRTING LINE in the innovative skirting suitable for smoothed lime, marmorino, stucco, and Venetian coats on civil plaster or plasterboard.

PKLIAA 60

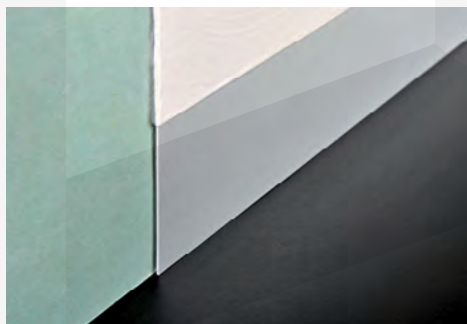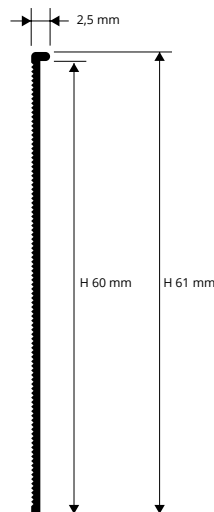


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H x L mm
PKLIAA 60	60 x 2,5


ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

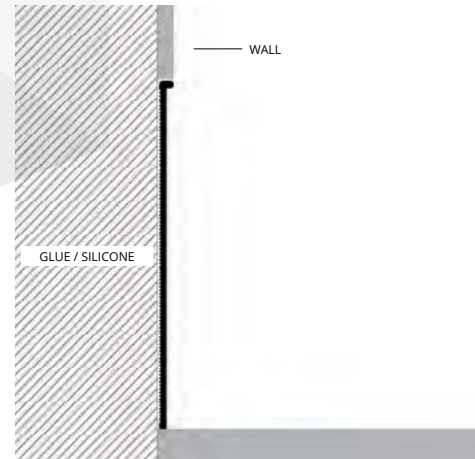

1. Fix the "PROSKIRTING LINE" using glue/silicone (exposed side), before making the required coat, calculating all the heights and distances. 2. Carry out the surface finishing aligning the lower part flush to the "PROSKIRTING LINE".

IMPORTANT: Pay attention to the external edges of the aluminium "Proskirting". They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.