


# PROTERRACE PC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


PROTERRACE PC is a perimeter profile in polished stainless steel inox aisi 304/1.4301-V2A designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make PROTERRACE PC a much sought after and easy to lay profile.

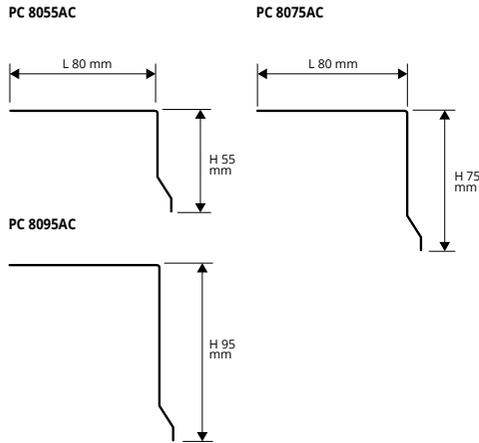

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm		
PC 8055AC	80 x 55		
PC 8075AC	80 x 75		*
PC 8095AC	80 x 95		*


## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

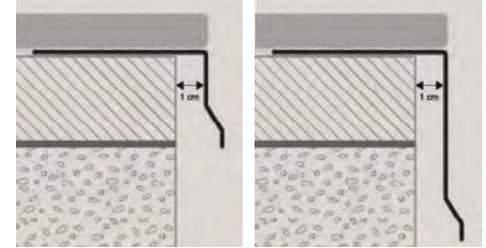

1. Choose "PROTERRACE PC" according to the desired height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles.

# EXTERNAL CORNERS and JOINTS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

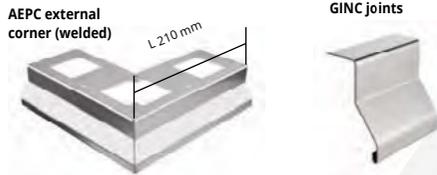

EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPC 55AC			
AEPC 75AC			
AEPC 95AC			


JOINTS - pack. 10 Pcs

Article			
GINC 55AC			
GINC 75AC			
GINC 95AC			

# PROTERRACE PC

VARNISHED/COATED ALUMINIUM

PROTERRACE PC is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make PROTERRACE PC a much sought after and easy to lay profile.

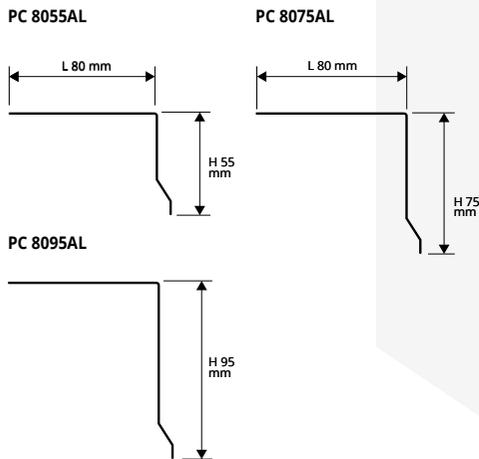

VARNISHED/COATED ALUMINIUM - bar length 2,7 lm  
pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)


Article	L x H mm		
PC 8055AL...	80 x 55		*
PC 8075AL...	80 x 75		*
PC 8095AL...	80 x 95		*

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PC 8055AL... (white) PC 8055ALB.

\* SEMIGLOSSY COLOURS ON DEMAND

B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

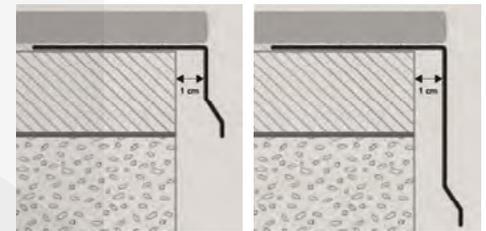


1. Choose "PROTERRACE PC" according to the desired colour and height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles.

\* EMBOSSED COLOURS ON DEMAND

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)

# EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM

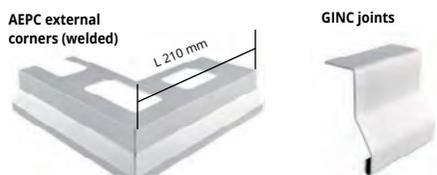

EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPC 55AL...			*
AEPC 75AL...			*
AEPC 95AL...			*

JOINTS - pack. 10 Pcs

Article			
GINC 55AL...			*
GINC 75AL...			*
GINC 95AL...			*

The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed