


PROTERRACE PCG

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make PROTERRACE PCG a much sought after and easy to lay profile.

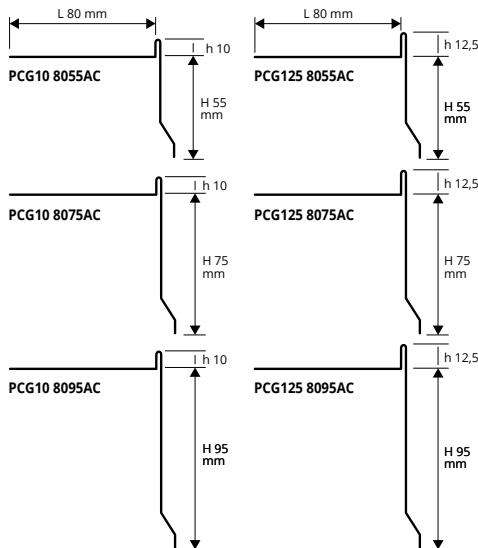

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm		
PCG10 8055AC	10 x 55 x 80		
PCG10 8075AC	10 x 75 x 80		
PCG10 8095AC	10 x 95 x 80		
PCG125 8055AC	12,5 x 55 x 80		
PCG125 8075AC	12,5 x 75 x 80		
PCG125 8095AC	12,5 x 95 x 80		


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

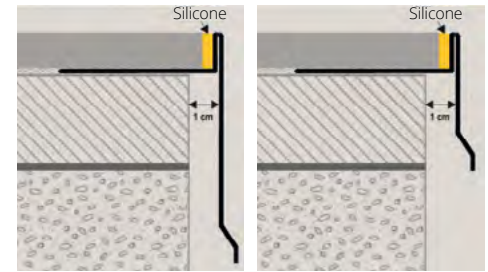

1. Choose "PROTERRACE PCG" according to the tile thickness.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with PROBAND FIX.

EXTERNAL CORNERS and JOINTS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



GING joints



EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPG10 55AC/75AC/95AC			
AEPG125 55AC/75AC/95AC			


JOINTS - pack. 10 Pcs

Article			
GING10 55AC/75AC/95AC			
GING125 55AC/75AC/95AC			

PROTERRACE PCG

VARNISHED/COATED ALUMINIUM

PROTERRACE PCG is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make PROTERRACE PCG a much sought after and easy to lay profile.

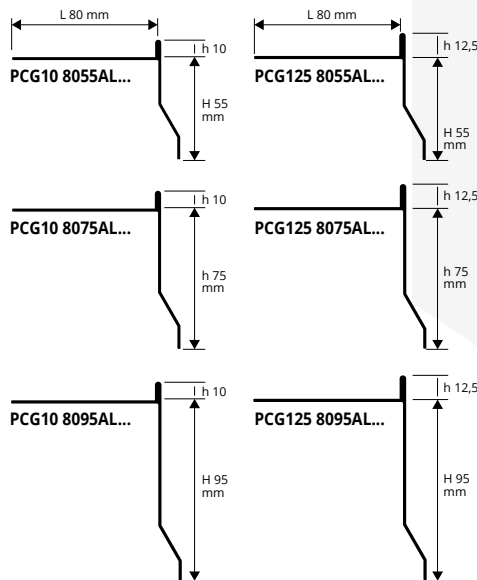


VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm		
PCG10 8055AL...	10 x 55 x 80		
PCG10 8075AL...	10 x 75 x 80		
PCG10 8095AL...	10 x 95 x 80		
PCG125 8055AL...	12,5 x 55 x 80		
PCG125 8075AL...	12,5 x 75 x 80		
PCG125 8095AL...	12,5 x 95 x 80		

Available in the colours: BF - White (9010) - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PCG10 8055AL... (white) PCG10 8055ALB.

EXAMPLES OF LAYING (for laying instructions, see above)

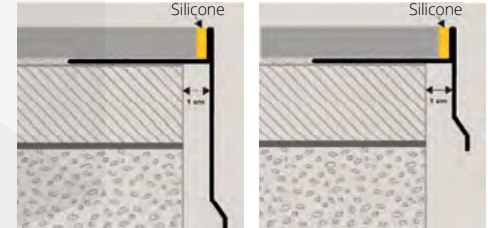

EMBOSSED COLOURS


BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
-------------------	------------------	------------------------------

* COLOURS ON DEMAND

EMBOSSED		
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)
SEMIGLOSSY		
B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM



GING joints



EXTERNAL CORNERS - pack. 10 Pcs

Article			
AEPG10 55AL.../75AL.../95AL...			
AEPG125 55AL.../75AL.../95AL...			

JOINTS - pack. 10 Pcs

Article			
GING10 55AL.../75AL.../95AL...			
GING125 55AL.../75AL.../95AL...			

The code of the selected colour must be added to the article code. E.g.: AEPG10 55AL... (white) AEPG10 55ALB.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed