

**PROTERRACE PCJ** is an edging profile in varnished aluminium designed to protect the screed and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCJ** is a much sought after and easy to lay profile.

# PROTERRACE PCJ

VARNISHED/COATED ALUMINIUM



**VARNISHED/COATED ALUMINIUM** - bar length 2,7 lm  
pack. 7 Pcs 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)


Article	h x H x L mm
PCJ10 8055AL...	10 x 55 x 80
PCJ10 8075AL...	10 x 75 x 80
PCJ10 8095AL...	10 x 95 x 80
PCJ125 8055AL...	12,5 x 55 x 80
PCJ125 8075AL...	12,5 x 75 x 80
PCJ125 8095AL...	12,5 x 95 x 80

Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PCJ10 8055AL... (white) PCJ10 8055ALB.

**EMBOSSED COLOURS**

BF - White (9010)	GF - Gray (7038)	A - Anthracite grey (no RAL)
-------------------	------------------	------------------------------


**EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**

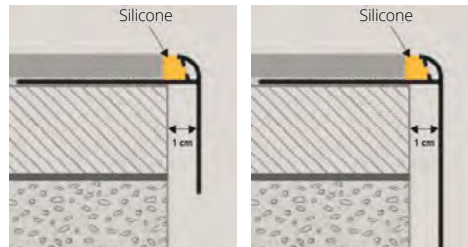

1. Choose "PROTERRACE PCJ" according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PCJ" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with PROBAND FIX.

**COLOURS ON DEMAND**

EMBOSSED		
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)
SEMIGLOSSY		
B - White (9010)	G - Gray (7038)	T - Dark brown (8019)
E - Beige (1019)		

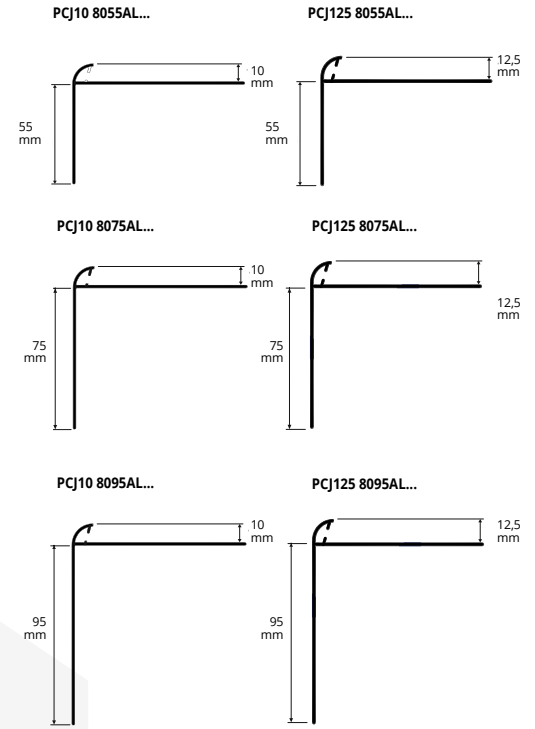

## EXTERNAL CORNERS and JOINTS

VARNISHED/COATED ALUMINIUM


**EXTERNAL CORNERS** - pack. 10 Pcs

Article
AEPJ10 55AL..
AEPJ10 75AL..
AEPJ10 95AL..
AEPJ125 55AL..
AEPJ125 75AL..
AEPJ125 95AL..

**JOINTS** - pack. 10 Pcs

Article
GINJ10 55AL..
GINJ10 75AL....
GINJ10 95AL..
GINJ125 55AL..
GINJ125 75AL..
GINJ125 95AL..

AEPJ external corner (welded)



GINJ joints



Available in the colours: BF - GF - A (EF - C - TF - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: AEPJ10 55AL... (white) AEPJ10 55ALB.

**PROTERRACE ECO** is a natural aluminium edging profile designed to protect the edges of the tiles laid on terraces and balconies. The profile is provided with a punched flange that ensures its fixing to the support. The front side of the profile protects the tile edges and is equipped with grooves that facilitate the grout grip. Thanks to its ease of application **PROTERRACE ECO** is a much sought after profile.

# PROTERRACE ECO

ALUMINIUM



**NATURAL ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm
PTEE 08AN	8
PTEE 10AN	10
PTEE 125AN	12,5

**SILVER ANODIZED ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTEE 08AA	8
PTEE 10AA	10
PTEE 125AA	12,5

**ARTICLES NOT FOR SALE SINGLY**

1. Choose "PROTERRACE ECO" according to the tile thickness.
2. Cut "PROTERRACE ECO" to the desired length and fix it to the support with nails.
3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
4. Lay the tiles, leaving about 5 mm between tiles and profile.
5. Seal the space between tiles and profile using PROBAND FIX.

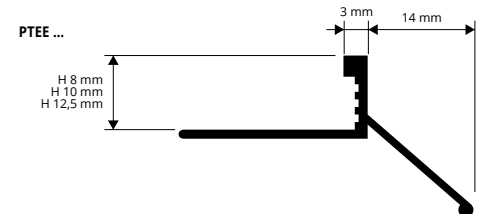

**EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS**



\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed