

STYLE STAIR L

STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. 77 wooden finishes are available (of which 53 on demand), plus 6 anodized finishes (of which 3 on demand). The profiles is made with 3 pcs. A natural aluminium base to scrow or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

TOP 77 WOODEN FINISHES (53 on demand)
6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYLC... 07 (PIN insert 07)	7 / 9
PINYLC... 09 (PIN insert 09)	10 / 12
PINYLC... 11 (PIN insert 11)	13 / 14
PINYLC... 13 (PIN insert 13)	14 / 15
PINYLC... 15 (PIN insert 15)	16 / 17
PINYLC... 17 (PIN insert 17)	18 / 20

COMPLETE


ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(77 wooden finishes of which 53 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYLC... 07 (PIN insert 07)	7 / 9
PINYLC... 09 (PIN insert 09)	10 / 12
PINYLC... 11 (PIN insert 11)	13 / 14
PINYLC... 13 (PIN insert 13)	14 / 15
PINYLC... 15 (PIN insert 15)	16 / 17
PINYLC... 17 (PIN insert 17)	18 / 20


COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 53W - 54W - 55W.
The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

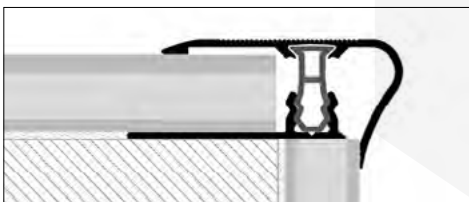

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

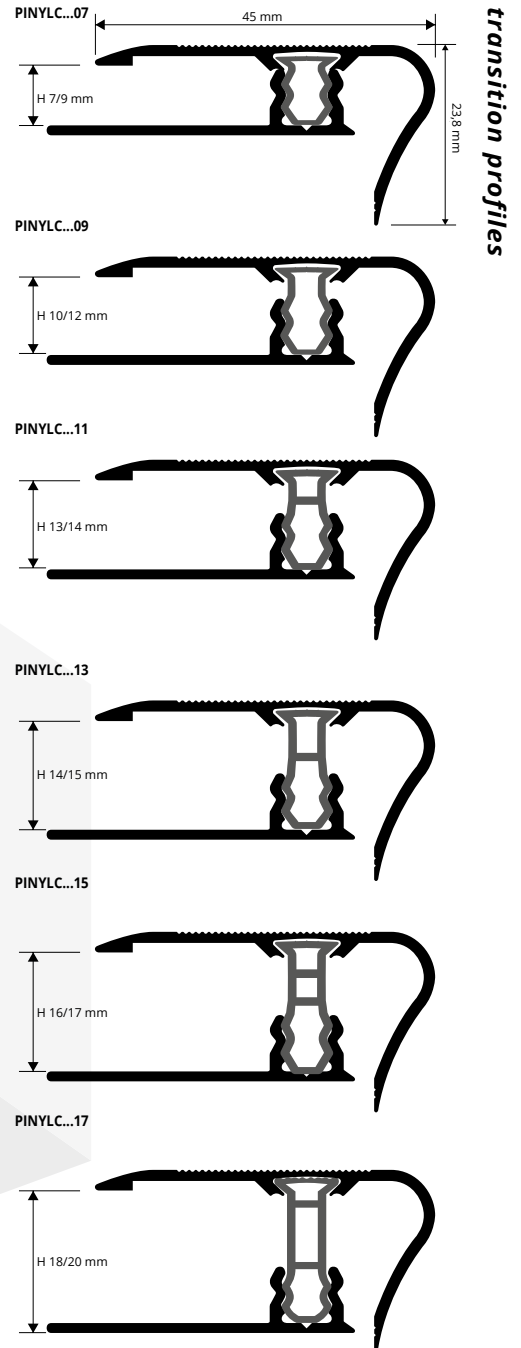

transition profiles

CLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED					
			ON DEMAND - MINIMUM QUANTITY 100 PCS		
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium
04W - Dark beech	05W - Light oak (strip)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir
32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak
42W - Grace oak	44W - Honey oak	45W - Marocco oak	53W	54W	55W

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed.
For sample finishes, contact the sales office for minimum quantities, timing and costs.