


STYLE STAIR

TOP (77 WOODEN FINISHES (56 on demand)
6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE

The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. 77 wooden finishes are available (of which 56 on demand), plus 6 anodized finishes (of which 3 on demand). Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

stair nosing profiles

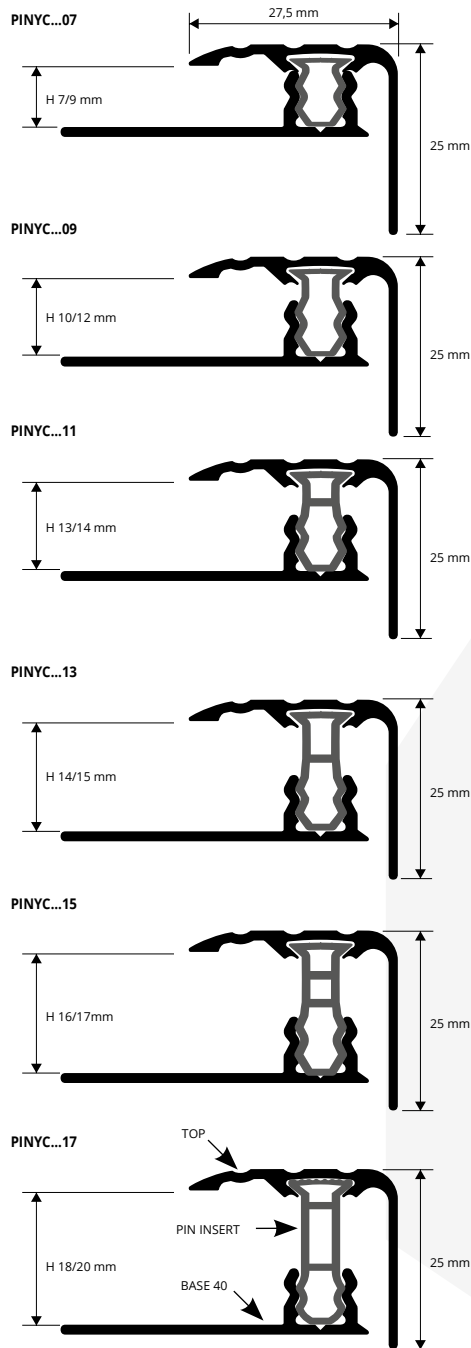

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYC... 07 (PIN insert 07)	7 / 9
PINYC... 09 (PIN insert 09)	10 / 12
PINYC... 11 (PIN insert 11)	13 / 14
PINYC... 13 (PIN insert 13)	14 / 15
PINYC... 15 (PIN insert 15)	16 / 17
PINYC... 17 (PIN insert 17)	18 / 20

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(77 wooden finishes of which 56 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYC... 07 (PIN insert 07)	7 / 9
PINYC... 09 (PIN insert 09)	10 / 12
PINYC... 11 (PIN insert 11)	13 / 14
PINYC... 13 (PIN insert 13)	14 / 15
PINYC... 15 (PIN insert 15)	16 / 17
PINYC... 17 (PIN insert 17)	18 / 20

COMPLETE

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak
34W - Havana oak	35W - Edinburgh oak	37W - Canvi oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	46W - Black decap'	48W - Cork oak	49W - Sand oak
65W - Tripoli	73W - Bangkok	75W - Liotard						

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.