


ZERO CURVE

TOP 77 WOODEN FINISHES (45 on demand)
AND 6 ANODIZED FINISHES (3 on demand)
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm.

77 wooden finishes are available (of which 45 on demand), plus 6 anodized finishes (of which 3 on demand). There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

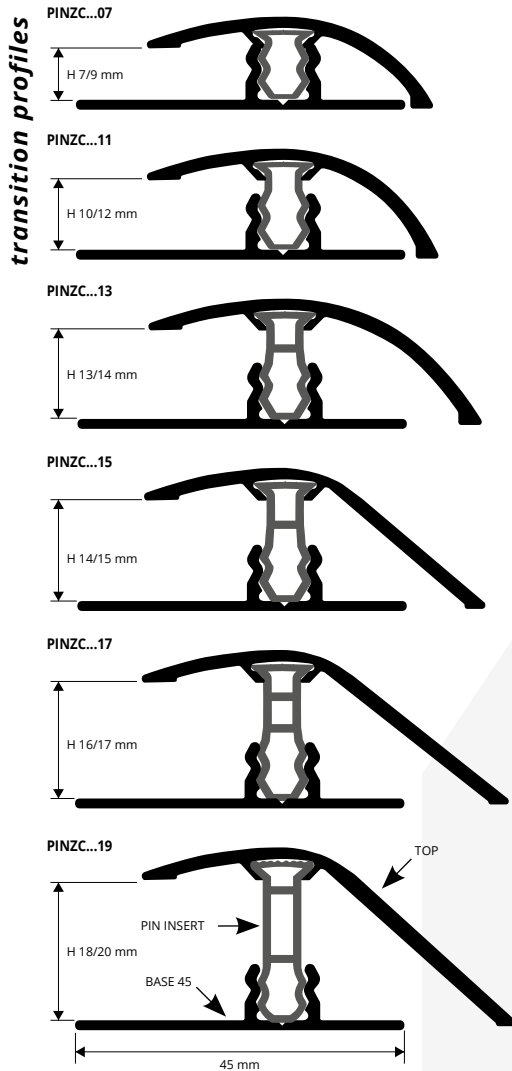

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm		
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9		
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12		
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14		
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15		
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17		
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20		

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm		
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9		
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12		
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14		
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15		
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17		
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20		

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish anod. gold) PINZCAO 07S.



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(77 wooden finishes of which 45 on demand) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)


Article	H mm		
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9		
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12		
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14		
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15		
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17		
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20		

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(77 wooden finishes of which 45 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm		
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9		
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12		
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14		
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15		
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17		
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20		

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

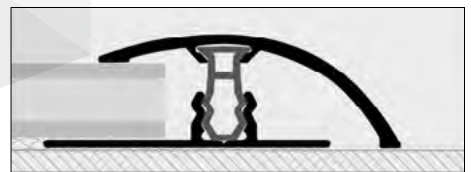

1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED					
ON DEMAND - MINIMUM QUANTITY 100 PCS					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decapex	48W - Cork oak	49W - Sand oak	53W
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard				

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.