


WTC

DEVELOPED FOR EXTREMELY HIGH MOVEMENTS

MIGUMAX

SEISMIC RESISTANT EXPANSION JOINT SOLUTIONS

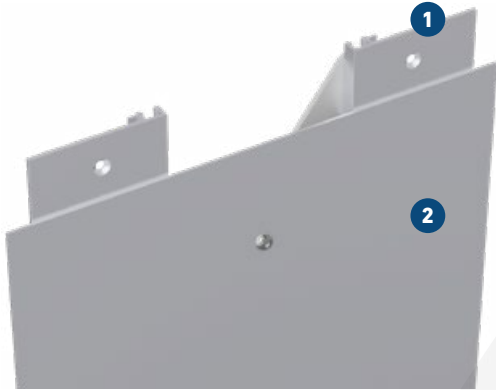

- 1 Cover plate can be individually coated** to match the adjacent wall
- 2 Long-lasting aluminium surface** with only little fixing due to larger distance of fixing holes, still ensuring perfect hold

Expansion joint cover	Joint width max. b_f max (mm)	Total movement thermal Δb_f (mm)	Visible width b_s (mm)	Installation height h (mm)
WTC 200	200	200 (± 100)	400	7
WTC 250	250	275 (+125/-150)	450	7
WTC 300	300	300 (+150/-200)	500	7
WTC 400	400	500 (+200/-300)	600	7
WTC 500	500	650 (+250/-400)	700	7

Joint width by the time of installation. Potential tolerance: ± 10 mm
Further joint widths available on demand.

Standard colour: Aluminium

Production length: 3 m

