


## ESG 33

FOR FLOORS WITH HYGIENIC REQUIREMENTS, RESISTANT TO AGGRESSIVE FLUIDS

## MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

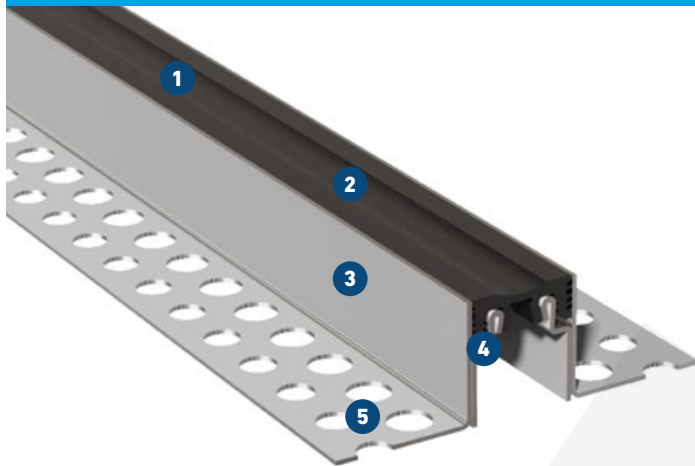

- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Smooth visible surface for easy cleaning**  
Antibacterial and physiologically safe
- 3 Solid stainless steel brackets**  
Resistant to aggressive media (e.g. sea water)
- 4 Multi directional movement**  
Expansion joint cover takes on settling
- 5 Secure fixing with MultiHole mounting bracket**  
Firm bond and extraordinary gripping strength

Expansion joint cover	Joint width $b_f \text{ max}$ [mm]	Total movement $\Delta b_f$ [mm]	Visible width $b_s$ [mm]	Joint width total $b_t$ [mm]	Joint height $h$ [mm]	Load bearing capacity* [kN]	Load bearing capacity* [kN]
ESG 33/15	30	6 ( $\pm 3$ )	33	139	15	30	30
ESG 33/35	30	6 ( $\pm 3$ )	33	108	35	30	30
ESG 33/40	30	6 ( $\pm 3$ )	33	108	40	30	30
ESG 33/50	30	6 ( $\pm 3$ )	33	108	50	30	30

All info on load capacities apply to doweled, not to floating installation.  
Larger installation heights on request.

**Material:** 1.4301 (alloy 304)

**Production length:** 3 m (ESG 33/15: 2 m)

**Standard colours:** black, grey, beige, brown

**Stainless steel:** mill finish

**Wall connections:** E1, E3, E4

