


FA 12

FOR COVERING JOINTS IN WALLS, CEILINGS AND FACADES – SURFACE
FIXING

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

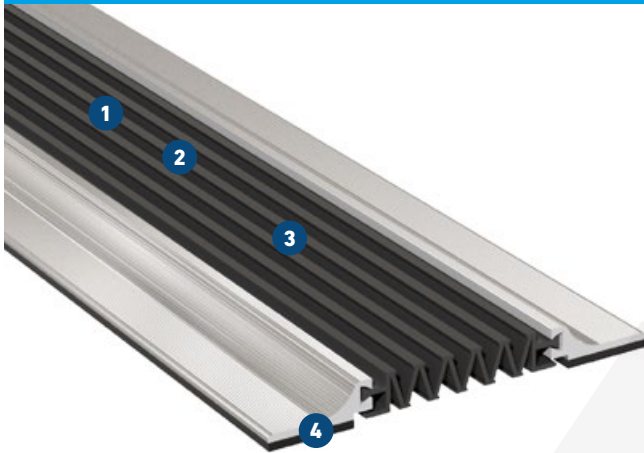

- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C)
- 2 Large movement capacity**
Special flexible folded insert for movements up to 20 mm
- 3 High flexibility of insert**
Suitable for straight and corner joints
- 4 Quick and easy installation**
Aluminium brackets with cellular rubber joint tapes to compensate for unevenness in the building surface


Expansion joint cover	Joint width b_f max [mm]	Total movement Δb_f [mm]	Joint width total b_t [mm]	Installation height [mm]	
FA 12/5	75	40 (± 20)	132	12	
FA 12/7	100	50 (± 25)	157	12	
FA 12/9	150	100 (± 50)	207	12	
FA 12/13	200	120 (± 60)	257	12	
FA 12/14	250	180 (± 90)	307	12	
FA 12/18	350	200 (± 100)	407	12	

The expansion joint covers can also be supplied with holes for fixing with screws (distance 300 mm each).


Please state exact details of total joint lengths in your order. The folded insert may then supplied in one piece up to approx. 50 m for the complete joint.

Production length: 4 m

Standard colour: grey

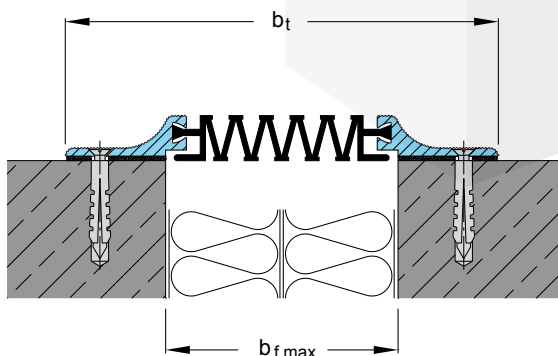

Corner version:




Insert for joint FA 12/5


Insert for joint FA 12/7


Insert for joint FA 12/9


Insert for joint FA 12/13