FKN 20

FOR FLOORS WITH PVC OR LINOLEUM – SURFACE FIXING

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



Perfectly designed insert

3 mm high upstand can be welded with PVC floorings

2 Flexible high quality elastomeric insert

Hard wearing, temperature resistant (-30°C to +120°C)

Economical

3 Insert replaceable at any time


Very flat design

Perfect for surface fixing

Expansion join cover	Total mo- vement	Joint width total	Joint width required		for coverings	Width of insert	Installation height	Thickness of alu side plates	Load bearing capacity*
	Δbf [mm]	bt [mm]	bf min [mm]		thickness [mm]	b _s [mm]	h [mm]		
FKN 20	5 (+3/-2)	97		20	3	17	12	2	pedestrians

* Light vehicles on request.

Production length: 4 m Standard colour: grey Wall connections: E3, E4

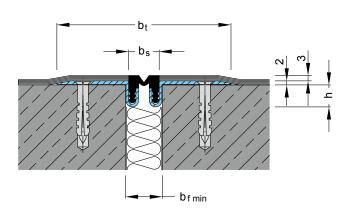

FTN 20

FOR FLOORS WITH CARPET – SURFACE FIXIN(

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



1 Perfectly designed insert

5 mm high upstand in conjunction with carpets

2 Flexible high quality elastomeric insert

Hard wearing, temperature resistant (-30°C to +120°C)

Economical

3 Insert replaceable at any time

Very flat design

4 Perfect for surface fixing

Expansion joint cover	Total mo- vement	Joint width total	Joint wid required		for coverings	Width of insert	Installation height	Thickness of alu side plates	Load bearing capacity*
	Δb _f [mm]	bt [mm]	bf min [mm]		thickness [mm]	b _s [mm]	h [mm]		
FTN 20	5 (+3/-2)	97		20	5	17	12	2	pedestrians

* Light vehicles on request.

Production length: 4 m Standard colours: black, grey Wall connections: E3, E4

