


**FN 50**

FOR FLOORS – SURFACE FIXING

**MIGUTEC**


JOINT COVERS FOR EXPANSION JOINTS

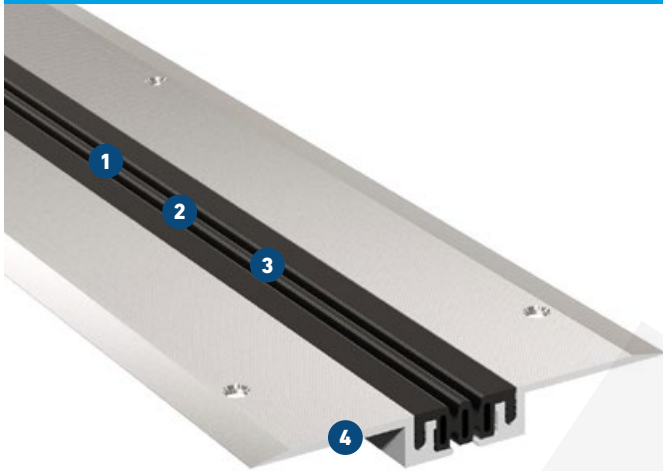

- 1 Anti slip surface ensures good skid resistance**  
Special striated surface, also suitable for sports areas
- 2 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C)
- 3 Economical**  
Insert replaceable at any time
- 4 Very flat design**  
Perfect for surface fixing

Expansion joint cover	Total movement $\Delta b_f$ [mm]	Joint width total $b_t$ [mm]	Joint width required $b_f \text{ min}$ [mm]	Width of insert $b_s$ [mm]	Installation height $h$ [mm]	Thickness of alu side plates [mm]	Load bearing capacity*
FN 50	16 ( $\pm 8$ )	170	50	43	16	3	pedestrians

\* Light vehicles on request.

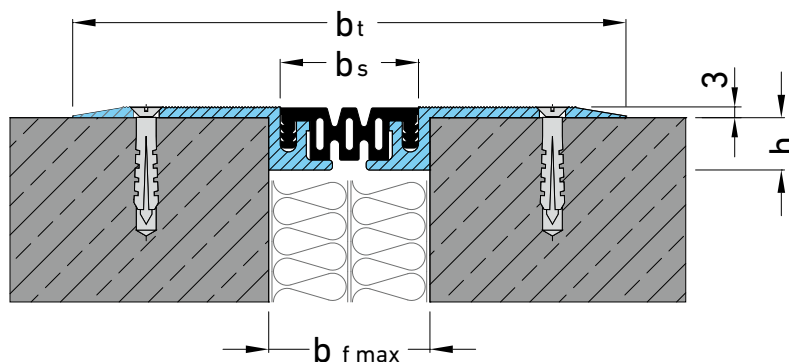
**Production length:** 4 m**Standard colours:** black, grey, beige**Wall connections:** E3, E4

**FN 58**

FOR FLOORS – SURFACE FIXING

**MIGUTEK**


JOINT COVERS FOR EXPANSION JOINTS

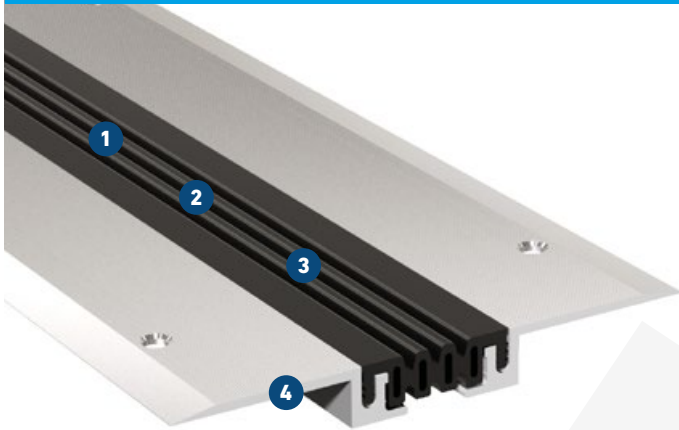

- 1 Anti slip surface ensures good skid resistance**  
Special striated surface, also suitable for sports areas
- 2 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C)
- 3 Economical**  
Insert replaceable at any time
- 4 Very flat design**  
Perfect for surface fixing

Expansion joint cover	Total movement $\Delta b_f$ [mm]	Joint width total $b_t$ [mm]	Joint width required $b_{f \text{ min}}$ [mm]	Width of insert $b_s$ [mm]	Installation height $h$ [mm]	Thickness of alu side plates [mm]	Load bearing capacity*
FN 58	22 ( $\pm 11$ )	178	60	52	16	3	pedestrians

\* Light vehicles on request.

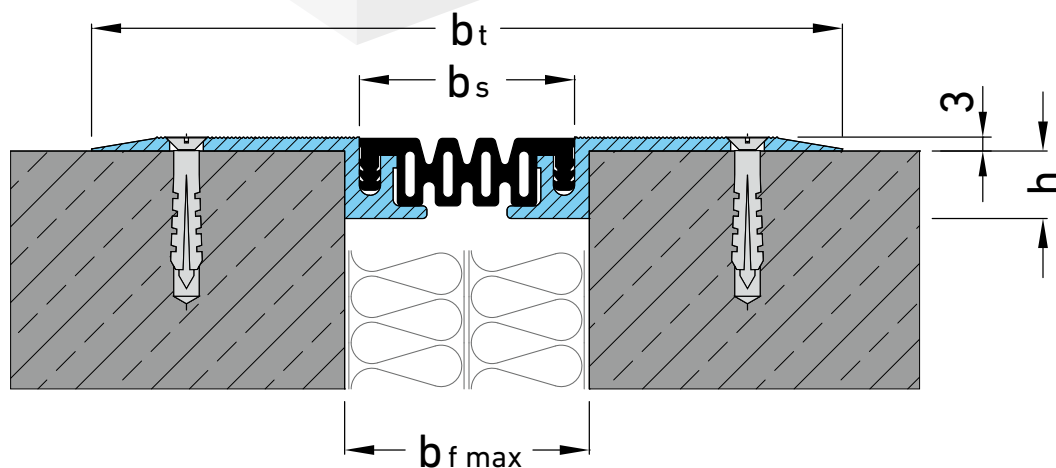
**Production length:** 4 m**Standard colours:** black, grey, beige**Wall connections:** E3, E4

**FN 65 / FN 85**

FOR FLOORS – SURFACE FIXING

**MIGUTEC**

JOINT COVERS FOR EXPANSION JOINTS

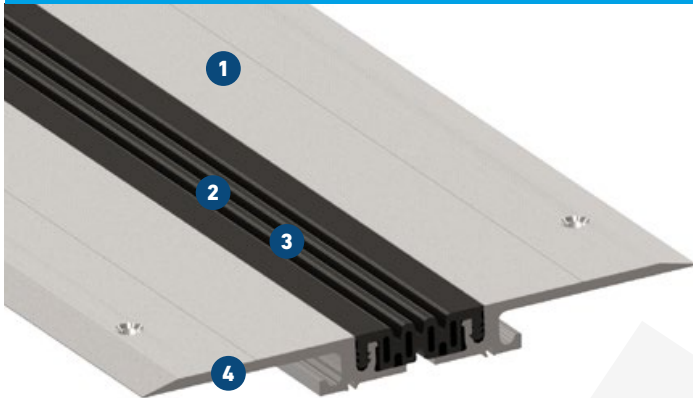

- 1 Anti slip surface ensures good skid resistance**  
Special striated surface, also suitable for sports areas
- 2 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C)
- 3 Economical**  
Insert replaceable at any time
- 4 Very flat design**  
Perfect for surface fixing

Expansion joint cover	Total movement $\Delta b_f$ [mm]	Visible width $b_s$ [mm]	Joint width total $b_t$ [mm]	Joint width required $b_{f \text{ min}}$ [mm]	Width of insert $b_s$ [mm]	Installation height $h$ [mm]	Thickness of alu side plates [mm]	Load bearing capacity*
FN 65	22 ( $\pm 11$ )		224	80	18	4	52	pedestrians
FN 85	30 ( $\pm 15$ )		242	100	18	4	70	pedestrians

\* Light vehicles on request.

**Production length:** 4 m**Standard colours:** black, grey, beige**Wall connections:** E3, E4