


FP 65 NI

WITH CAPPINGS MADE OF STAINLESS STEEL

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

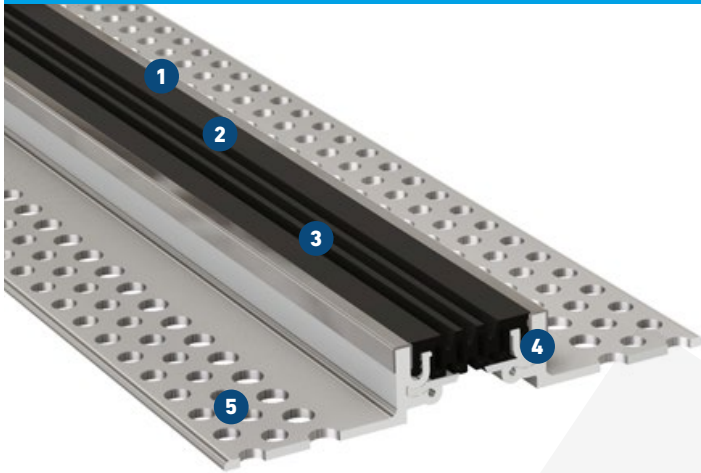

- 1 Visible surface in stainless steel**
- 2 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 3 Multi directional movement**
High load capacity due to sturdy construction
Solid aluminium brackets
- 4 MultiHole mounting bracket**
for secure fixing
- 5 Quick and easy installation**
Positive connection of production lengths by means of connection pieces
- 6**

Expansion joint cover	Joint width b_f max [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]	Load bearing capacity [kN]	Load bearing capacity* [kN]
FP 65/21 NI	55	22 (± 11)	67	205	21	30	300
FP 65/31 NI	55	22 (± 11)	67	205	31	30	300
FP 65/51 NI	55	22 (± 11)	67	205	51	30	300

* no continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colours: black, grey

Wall connections: E3, E4

