


# FPG 55

FOR FLOORS AND WALLS WITH HYGIENIC REQUIREMENTS

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

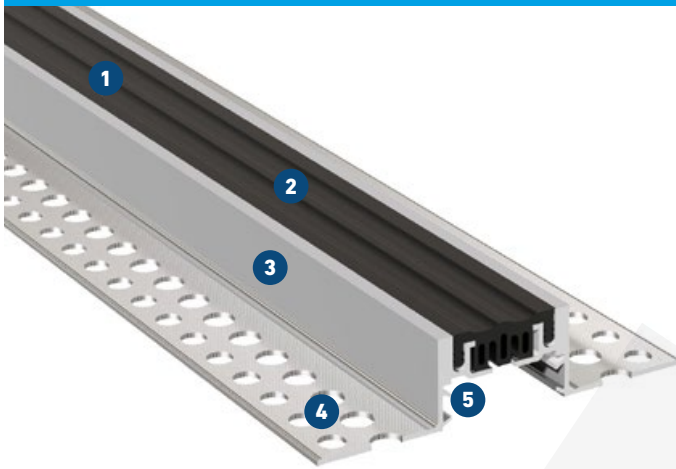

- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Smooth visible surface for easy cleaning**  
Antibacterial and physiologically safe
- 3 High load capacity due to sturdy construction**  
Solid aluminium brackets
- 4 MultiHole mounting bracket**  
for secure fixing
- 5 Quick and easy installation**  
Solid, but light aluminium brackets for quick installation in screed or tiled floorings

| Expansion joint cover | Joint width<br>$b_f \text{ max}$<br>[mm] | Total movement<br>$\Delta b_f$<br>[mm] | Visible width<br>$b_s$<br>[mm] | Joint width total<br>$b_t$<br>[mm] | Joint height<br>$h$<br>[mm] | Load bearing capacity*<br>[kN] | Load bearing capacity*<br>[kN] |
|-----------------------|------------------------------------------|----------------------------------------|--------------------------------|------------------------------------|-----------------------------|--------------------------------|--------------------------------|
| FPG 55/20             | 50                                       | 8 ( $\pm 4$ )                          | 55                             | 150                                | 20                          | 30                             | 300                            |
| FPG 55/25             | 50                                       | 8 ( $\pm 4$ )                          | 55                             | 150                                | 25                          | 30                             | 300                            |
| FPG 55/35             | 50                                       | 8 ( $\pm 4$ )                          | 55                             | 150                                | 35                          | 30                             | 300                            |
| FPG 55/50             | 50                                       | 8 ( $\pm 4$ )                          | 55                             | 150                                | 50                          | 30                             | 300                            |
| FPG 55/75             | 50                                       | 8 ( $\pm 4$ )                          | 55                             | 150                                | 75                          | 30                             | 300                            |

\* no continuous use

For installation in asphalt, please ask for our technical advice.

Larger installation heights on request.

**Production length:** 4 m

**Standard colours:** black, grey, beige

**Wall connections:** E1, E3, E4

