


FV 35

FOR FLOORS AND WALLS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

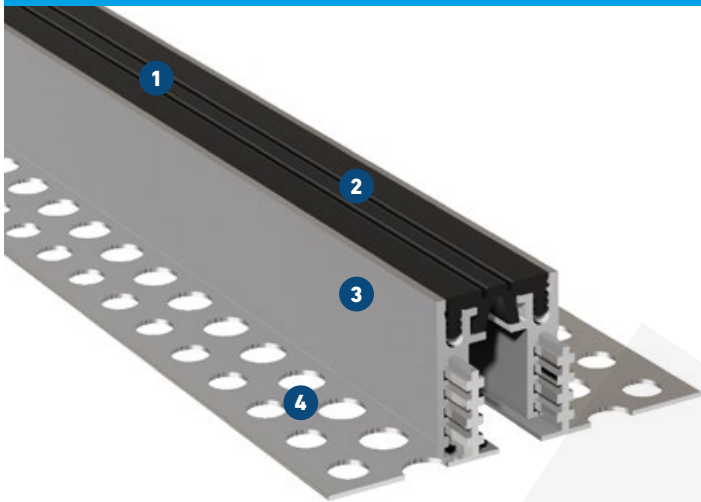

1 Flexible high quality elastomeric insert
Hard wearing, temperature resistant (-30°C to +120°C), replaceable

2 Multi directional movement

Quick and easy installation

Solid, but light aluminium brackets for quick installation in screed or tiled floorings

3 MultiHole mounting bracket
for secure fixing

4 Flexible adaptation to site conditions
Available with adjustable installation height

Expansion joint cover	Joint width b_f max [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]	Load bearing capacity [kN]	Load bearing capacity* [kN]
FV 35/15	30	10 (± 5)	35	108	15	30	30
FV 35/20	30	10 (± 5)	35	108	20	30	30
FV 35/25	30	10 (± 5)	35	108	25	30	30
FV 35/35	30	10 (± 5)	35	125	35	30	30
FV 35/50	30	10 (± 5)	35	125	50	30	30
FV 35/4055	30	10 (± 5)	35	108	40, 45, 50, 55	30	30
FV 35/6075	30	10 (± 5)	35	108	60, 65, 70, 75	30	30
FV 35/7590	30	10 (± 5)	35	108	75, 80, 85, 90	30	30
FV 35/90105	30	10 (± 5)	35	108	90, 95, 100, 105	30	30

* no continuous use

All info on load capacities apply to doweled, not to floating installation.
For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colours: black, grey, beige, brown

Wall connections: E1, E3, E4

