


FV 41

FOR FLOORS AND WALLS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

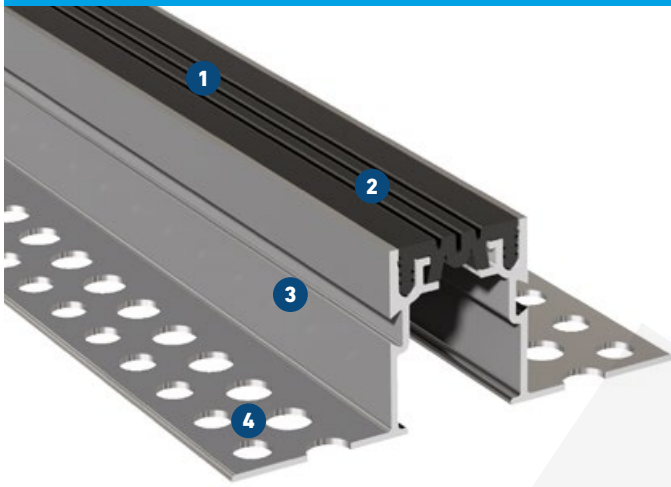

1 Flexible high quality elastomeric insert
Hard wearing, temperature resistant (-30°C to +120°C), replaceable

2 Multi directional movement

Quick and easy installation

Solid, but light aluminium brackets for quick installation in screed or tiled floorings

3

Flexible adaptation to site conditions

Available with adjustable installation height

MultiHole mounting bracket

for secure fixing

4

Expansion joint cover	Joint width b_f max [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]	Load bearing capacity [kN]	Load bearing capacity* [kN]
FV 41/15	35	14 (± 7)	41	114	15	30	30
FV 41/20	35	14 (± 7)	41	114	20	30	30
FV 41/25	35	14 (± 7)	41	114	25	30	30
FV 41/35	35	14 (± 7)	41	131	35	30	30
FV 41/50	35	14 (± 7)	41	131	50	30	30
FV 41/4055	35	14 (± 7)	41	114	40, 45, 50, 55	30	30
FV 41/6075	35	14 (± 7)	41	114	60, 65, 70, 75	30	30
FV 41/7590	35	14 (± 7)	41	114	75, 80, 85, 90	30	30
FV 41/90105	35	14 (± 7)	41	114	90, 95, 100, 105	30	30

* no continuous use

All info on load capacities apply to doweled, not to floating installation.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colours: black, grey, beige

Wall connections: E1, E3, E4

