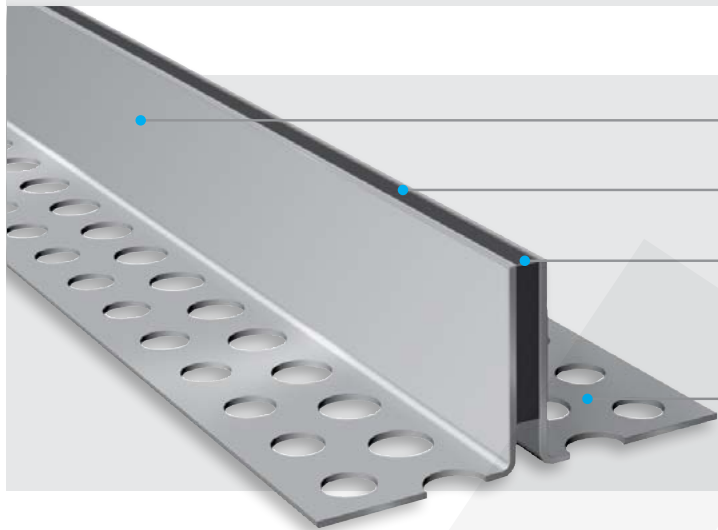


## Contraction joint system

## ESF 8 ES Solid Stainless Steel

**High load capacity**

Solid stainless steel brackets, suitable for fork lift trucks

**Flexible (cellular rubber) insert**



Suitable for sound insulation

**Small visible surface**

Slim design, visible width of profile 8 mm only

**MultiHole mounting bracket**

for secure fixing

Profile	Joint width max. $b_f \text{ max}$ [mm]	Total Movement $\Delta b_f$ [mm]	Visible width of profile $b_s$ [mm]	Total width of profile $b_t$ [mm]	Installation height $h$ [mm]	Load capacity*  [kN]	Load capacity  [kN]
ESF 8/30 ES	5	2 ( $\pm 1$ )	8	85	30	300	35
ESF 8/35 ES	5	2 ( $\pm 1$ )	8	85	35	300	35
ESF 8/40 ES	5	2 ( $\pm 1$ )	8	85	40	300	35
ESF 8/50 ES	5	2 ( $\pm 1$ )	8	85	50	300	35

\*not designed for permanent use  
Larger heights on request.

Standard colours: grey Special colour: black

Production length: 3 m

