


# FSV 280

FOR HEAVY DUTY FLOORS

# MIGUTRANS

HEAVY-DUTY ALL-METAL JOINT SOLUTIONS  
FOR LARGE TRAFFIC LOADS

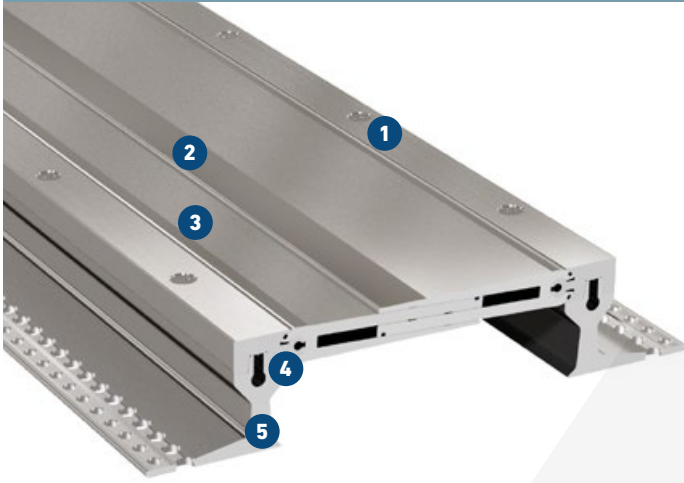

- 1 Removable bridging unit**  
serviceable for inspection, replaceable centre parts
- 2 Visible surface has no gaps**  
avoids dirt accumulation
- 3 Striated surface**  
ensures good skid resistance
- 4 Articulated telescoping system**  
absorbs movement in 3 directions
- 5 Solid all-metal expansion joint**  
hard wearing, maintenance-free, long lasting

Expansion joint cover	Joint width max. $b_f$ [mm]	Total movement $\Delta b_f$ [mm]	Visible width $b_s$ [mm]	Joint width total $b_t$ [mm]	Joint height $h$ [mm]	Load bearing capacity  [kN]	Load bearing capacity  [kN]	Load bearing capacity  solid plastic tyres [kg/mm]
FSV 280/45	200	85 ( $\pm 42.5$ )	280	403	45	35	35	6,5
FSV 280/80	200	85 ( $\pm 42.5$ )	280	403	80	35	35	6,5
FSV 280/130	200	85 ( $\pm 42.5$ )	280	403	130	35	35	6,5

**Production length:** 3 m

**Standard colour:** Aluminium

Larger installation heights on request.

Corner versions:

