


## PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded fin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.



PERIMETER SPACER PROSUPPORT SYSTEM  
Stainless steel AISI 316L / 1.4404 - V4A pack 40 Pcs

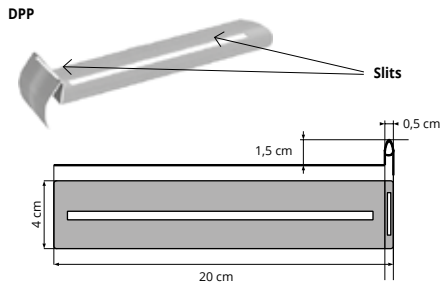

Article	€/Pc	€/Pack.
DPP		

## PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

Article	€/Pc
PSTAK	



RUBBER DISK for laying on bituminous roof membrane  
H 2 mm - Pack 100 Pcs (box 100 pcs)

Article	H (mm)	€/Pc	€/Pack.
LVGG 02	2		

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



ADJUSTABLE SPACER TABS  
polypropylene Pack 80 pcs

Article	L x H mm	Pcs/pack	€/Pc	€/Pack.
PSTJ	80 x 20	80		

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF  
Pack 40 pairs

Article	L x H mm	pairs/pack	€/Pair	€/Pack.
PSTWP	20 x 60	40		

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.

SPACER FOR APPLICATION ON GRAVEL  
Pack 100 Pcs (box 100 pcs)

Article	€/Pc	€/Pack.
---------	------	---------

\* DILV

Transparent plastic cross spacer for laying on gravel or irregular surfaces.

